



Data Sheet

RISH CON-P



Measure



Control



Record



Analyze

Application

The **RISH CON - P** transducer is used to measure and convert active, reactive, apparent power, Phase angle & Power Factor of a Single-phase or Three-phase AC system with balanced or unbalanced load into a proportional **load independent DC current or voltage output** signal.

Salient Features

- True RMS measurement.
- Fully **onsite programmable** input voltage range & input current range
- On Site Configurable as Active / Reactive / Apparent Transducer / Phase Angle / Power Factor
- **Onsite selectable output type**(DC current / DC voltage)
- **Single or Dual output**
- Accuracy **Class 0.2 (IEC / EN 60688)** for Power
- Accuracy **Class 0.5 (IEC / EN 60688)** for Phase Angle / Power Factor
- Seven Segment **LCD Display**
- **Rs485(Modbus)** Communication
- Wide Auxiliary power supply
Accepts any input between 60V-300V AC/DC or 24V-60V AC/DC
- Output Response Time < 750 ms standard
- Fast and easy installation on DIN RAIL or onto a wall or in a panel using optional screw hole bracket
- Connection Terminal : Conventional Screw type.

Product Features

Measuring Input:

AC Voltage/Current input signal,sine wave or distorted wave form.

Analog Output (Single or dual):

Isolated analog output which can be set to voltage or current output onsite.

Accuracy:

Output signal accuracy **class 0.2** as per International **IEC / EN 60688** Standard.

Programmable Input/Output:

The Transducer can be programmed onsite using front key & display or through programming port (COM) or through RS 485.

LED Indication:

LED indication for power on and output type.
(Current output : Red LED, Voltage output : Green LED).



Fig. 1 RISH CON - P

Display Module(Optional):

Optional 7 segment LCD display with backlit & keypad. For displaying measured parameter & onsite configuration of Input/output.

RS485 Communication(Optional):

Optional RS485 communication is available. For reading measured parameter & onsite configuration of input/output.

Symbols and their meaning:

X	Input
	Apparent /Active/Reactive
	Power Factor / Phase Angle
X0	Start value of input
X1	Elbow value of input
X2	End value of input
Y	Output DC Voltage / DC Current
Y0	Start value of output DC
	Voltage / DC Current
Y1	Elbow value of output DC
	Voltage / DC Current
Y2	End value of output DC
	Voltage / DC Current
R _N	Rated value of output burden
F _N	Nominal Frequency



Measure



Control



Record



Analyze

Technical Specifications

Measured Parameter

Active Power / Reactive Power / Apparent Power / Power Factor /Phase Angle.

Network Type Supported by Power transducer: Single Phase / 3 phase 3 wire Unbalanced / 3 phase 4 wire Unbalanced
3 phase 3 wire balanced / 3 phase 4 wire balanced

Network Type Supported by Power Factor & Phase Angle : Single Phase / (U12 I1) 3 Phase Balanced load
(U13 I1) 3 Phase Balanced load / (U23 I1) 3 Phase Balanced load
3 phase 3 wire balanced / 3 Phase 4 wire Balanced load

Nominal Voltage Input(U_N):

Nominal input Voltage (AC RMS)
(PT Secondary range) $100\text{ V} \leq U_N \leq 500\text{ VL-L}$

PT Primary range 100V to 692.8 KVL-L

Nominal Frequency F_N 25 Hz to 65 Hz

Nominal input Voltage burden $< 0.6\text{ VA per phase at } U_N$

Overload Capacity: $1.2 * U_N$ continuously,
 $2 * U_N$ for 1 second, repeated 10 times at 10 minute intervals
(U_N maximum 300V with power supply powered from measuring input).

Nominal Current Input(I_N):

Nominal input Current (AC RMS)
(CT Secondary range) $1\text{ A} \leq I_N \leq 5\text{ A}$

CT Primary range 1 A to 9999 A

Nominal Frequency F_N 25 Hz to 65 Hz

Nominal input Current burden $< 0.2\text{ VA per phase at } I_N$

Overload Capacity: $1.2 * I_N$ continuously,
 $10 * I_N$ for 3 second, repeated 5 times at 5 minute intervals.
 $50 * I_N$ for 1 second, repeated 1 times at 1 hour interval (Max 250 A).

Allowed measuring range end values X_2 (calibration factor X_c):

With single phase AC active/reactive/apparent power $0.30 \leq (X_2/\text{Rated Power}) \leq 1.3 * U_N / \sqrt{3} * I_N$

With 3-phase AC active/reactive/apparent power $0.30 \leq (X_2/\text{Rated Power}) \leq 1.3 * \sqrt{3} * U_N * I_N$

(For single phase Rated Power= $U_N / \sqrt{3} * I_N$)

(For Three phase Rated Power= $\sqrt{3} * U_N * I_N$)

Phase Angle & Power Factor measuring Range:

Minimum span 20° to Maximum Span 360°

Measuring Output Y(Single or Optional Dual):

Output type Load independent DC Voltage , DC Current

On site selectable through DIP switches.

Load independent DC output Unipolar $0 \dots 20\text{mA} / 4 \dots 20\text{mA}$ OR $0 \dots 10\text{V}$.

Bipolar $-20\text{mA} \dots 0 \dots +20\text{mA}$ OR $-10\text{V} \dots 0 \dots +10\text{V}$

Output burden with DC current output Signal $0 \leq R \leq 15\text{V}/Y_2$

Output burden with DC voltage output Signal $Y_2/(2\text{ mA}) \leq R \leq \infty$



Measure



Control



Record



Analyze

Current limit under overload R=0	$\leq 1.25 * Y2$ with current output ≤ 100 mA with voltage output
Voltage limit under R= ∞	$< 1.25 * Y2$ with voltage output ≤ 30 V with current output
Residual Ripple in Output signal	$\leq 1\%$ pk-pk
Response Time	< 750 ms

Auxiliary Power Supply:

AC/DC Auxiliary Supply 60V... 300 VAC-DC $\pm 5\%$ or 24V...60V VAC-DC $\pm 10\%$
 AC Auxiliary supply frequency range 40 to 65 Hz

Auxiliary supply consumption

60V...300 VAC-DC	≤ 8 VA for Single output ≤ 10 VA for Dual output
24V...60 VAC-DC	≤ 5 VA for Single output ≤ 6 VA for Dual output

Accuracy :(Acc. to IEC / EN 60688)

Reference Value Output end Value Y2 (Voltage or Current)

Basic Accuracy for power transducer $0.2 * C$

Basic Accuracy for Phase Angle & Power Factor transducer $0.5 * C$

Factor C (The highest value applies if calculated C is less than 1, then C=1 applies)

<p>Linear characteristics:</p> $C = \frac{1 - \frac{Y_0}{Y_2}}{1 - \frac{X_0}{X_2}} \text{ or } C=1$	<p>Bent characteristics:</p> <p>For $X_0 \leq X \leq X_1$ $C = \frac{Y_1 - Y_0}{X_1 - X_0} \cdot \frac{X_2}{Y_2} \text{ or } C=1$</p> <p>For $X_1 \leq X \leq X_2$ $C = \frac{1 - \frac{Y_1}{Y_2}}{1 - \frac{X_1}{X_2}} \text{ or } C=1$</p>
--	--

Reference conditions for Accuracy :

For Power Transducer:

Ambient temperature $23^\circ\text{C} \pm 1^\circ\text{C}$
 Pre-conditioning 30 min acc. to IEC / EN 60688

Input Variable Voltage Rated / Current Rated

Input waveform Sinusoidal, Form Factor 1.1107

Input signal frequency 50 or 60Hz

Active / Reactive factor $\cos \Phi = 1$ resp. $\sin \Phi = 1$

For Phase Angle & Power Factor Transducer:

Reference Value For Phase angle = 90° resp. For power factor = 0.5

Auxiliary supply voltage At nominal range

Output Load $R_n = 7.5 \text{ V} / Y_2 \pm 1\%$ With DC current output signal
 $R_n = Y_2 / 1 \text{ mA} \pm 1\%$ With DC voltage output signal

Miscellaneous Acc. to IEC / EN 60688



Measure



Control




Record



Analyze

Output Characteristics:

Example of setting with Linear Characteristics :

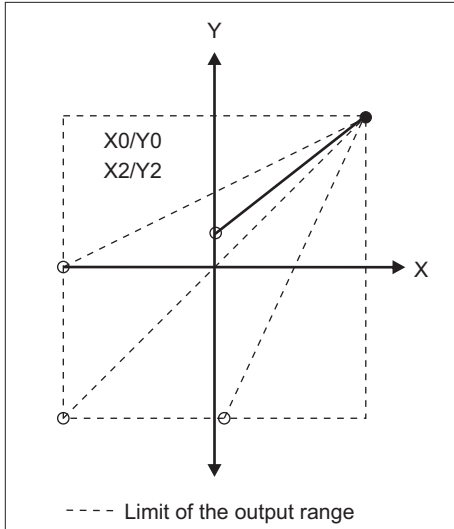


X0 = Start value of input
Y0 = Start value of output
X1 = Elbow value of input

Y1 = Elbow value of output
X2 = End value of input
Y2 = End value of output

Note: End value(Y2) of output cannot be changed onsite.

Example of setting with bent Characteristics :

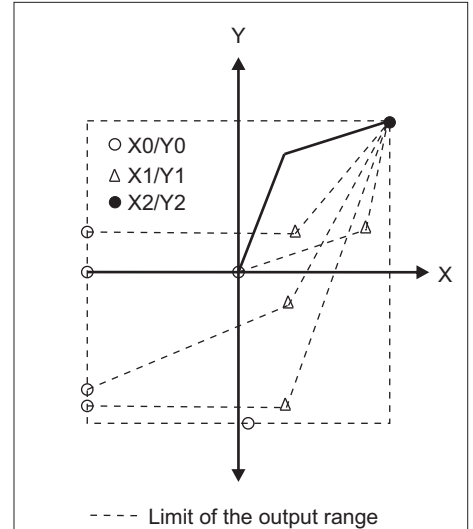

Additional Error:

Temperature influence

$\pm 0.2\%/10^{\circ}\text{C}$

Influence of Variations:

As per IEC / EN 60688 standard.

Output stability

< 30 min

Safety:

Protection Class
Protection

II (Protection Isolated, EN 61010)
IP 40, housing according to EN 60 529
IP 20 ,terminal according to EN 60 529

Pollution degree
Installation Category
Insulation Voltage

2
III
1min. (EN 61010-1)
7700V DC, Input versus outer surface
5200V DC, Input versus all other circuits
5200V DC, Auxiliary supply versus outer surface and output
690V DC, Output versus output versus each other versus outer surface.

Installation Data:

Mechanical Housing

Lexan 940 (polycarbonate)
Flammability Class V-0 acc. To UL 94, self extinguishing,
non dripping, free of halogen
Rail mounting / wall mounting
Approx. 0.4kg

Mounting position
Weight

Connection Terminal

Connection Element

Conventional Screw type terminal with indirect wire pressure

Permissible cross section
of the connection lead

$\leq 4.0 \text{ mm}^2$ single wire or $2 \times 2.5 \text{ mm}^2$ fine wire



Measure



Control



Record



Analyze

Environmental:

Operating temperature	0°C... <u>23°C</u> ...45°C(usage Group II)
Storage temperature	-40 °C to 70 °C
Relative humidity of annual mean	≤ 75%
Altitude	2000m max

Ambient tests:

EN 60 068-2-6	Vibration
Acceleration	± 2 g
Frequency range	10....150...10Hz,
Rate of frequency sweep	1 octave/minute
Number of cycles	10, in each of the three axes
EN 60 068-2-7	Shock
Acceleration	3 x 50g 3 shocks in each direction

IEC 1000-4-2/-3/-4/-5/-6 EN 55 011	Electromagnetic compatibility.
---------------------------------------	--------------------------------

LED Indication:

ON LED	Aux.supply healthy condition	Green LED continuous ON
O/P1 LED	Output1 voltage selection	Green LED continuous ON
	Output1 current selection	Red LED continuous ON
O/P2 LED	Output2 voltage selection	Green LED continuous ON
	Output2 current selection	Red LED continuous ON

Electrical Connections:

Connection	Terminal details	
Measuring Voltage Input	UL1	2
	UL2	5
	UL3	8
	N	11
Auxilliary Power supply	~ , +	13
	~ , -	14
Measuring output - 1	+	15
	-	16

Connection	Terminal details	
Measuring Current Input	I1	1
	I1'	3
	I2	4
	I2'	6
	I3	7
	I3'	9
Measuring output - 2	+	17
	-	18



Measure



Control



Record




Analyze


Electrical Networks

3 Phase 4 Wire Unbalanced Load	
3 Phase 3 Wire Unbalanced Load	
3 Phase 4 Wire Balanced Load	
3 Phase 3 Wire Balanced Load	
1 Phase 2 Wire	
U12 I1 3 Phase Balanced Load	
U13 I1 3 Phase Balanced Load	
U23 I1 3 Phase Balanced Load	

Terminal Details

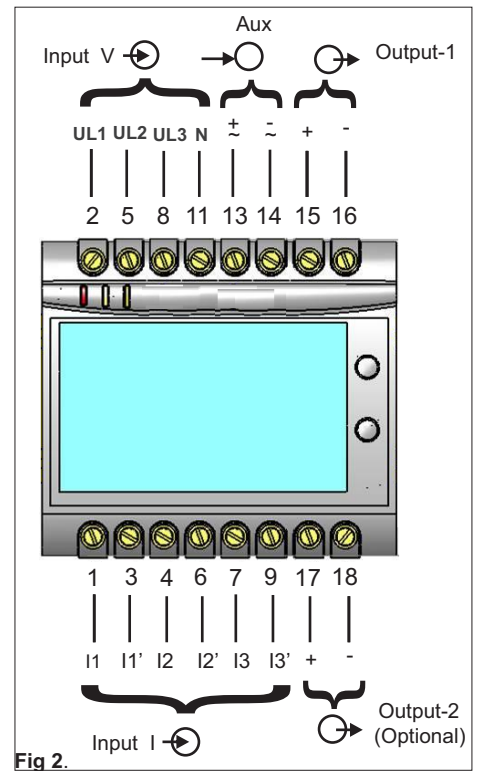

Dimensions

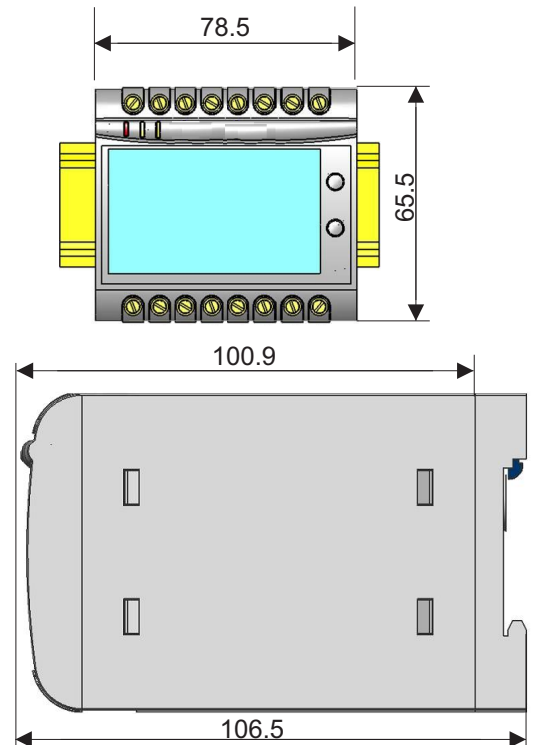

Measure



Control



Record



Analyze

Programming

(Figs. 4 and 5)

Programming of transducer can be done in three ways :

- 1) Programming Via Front LCD & two keys.
- 2) Programming Via optional RS485(MODBUS) communication port. (Device address,PT Ratio,CT Ratio,Transducer type>Password, communication parameter,Output Type & simulation mode can be programmed).
- 3) Programming Via Programming port available at front of RISH CON Transducers using optional PRKAB601 Adapter.

Programming Via Programming port (COM)

A PC with RS 232 C interface along with the programming cable PRKAB601 and the configuration software are required to program the transducer.

The connections between

PC ↔ PRKAB 601 ↔ Rish CON Transducer.

The power supply must be applied to transducer before it can be programmed.

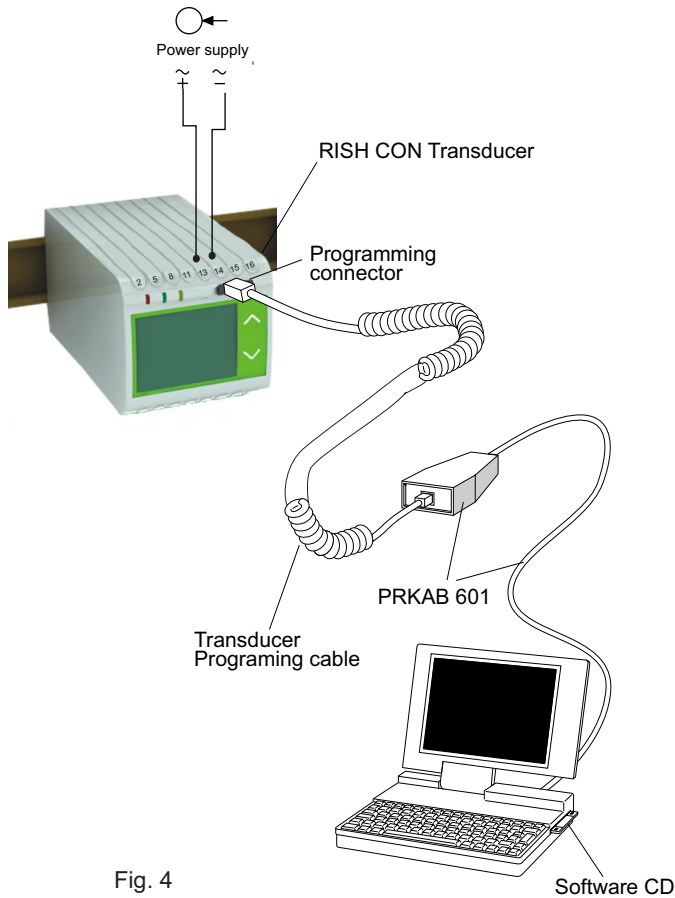


Fig. 4

The Configuration software is supplied on a CD. The programming cable PRKAB601 adjusts the signal level and provides the electrical insulation between the PC and RISH CON Transducers.

Configuring RISH CON Transducer :

To configure RISH CON Transducer Input / Output one of the three programming methods can be adapted along with mechanical switch setting (DIP switch setting on PCB).

DIP Switch Setting for OUTPUT :

Type of output (current or voltage signal) has to be set by DIP switch (see Fig.5).

For programming of DIP switch the user needs to open the transducer housing & set the DIP switch located on PCB to the desired output type Voltage or Current. Output range changing is not possible with DIP switch setting.

Refer below Fig. 5 for DIP switch setting.

The four pole DIP switch is located on the PCB in the RISH CON Transducer

DIP Switch Setting	Type of Output Signal
	load-independent current
	load-independent voltage

Fig. 5



Measure



Control



Record



Analyze

Ordering Information

Product Code	CP41-	X	X	XX	XX	X	X	X	X	X	00
Model	Programmable Power Transducer	P									
System type	4WUB (Onsite Selectable 1Ph. 2W, 3Ph. 3W/4W & Balanced / Unbalanced)	3									
Input Voltage	Programmable 100...500V		8F								
Input Current	Programmable 1...5A			75							
Power Supply	60-300 VAC/DC 24-60 VAC/DC				H F						
Output	1 O/P 2 O/P					1 2					
Display Module	With Display Without Display						D Z				
RS485 Module	With RS-485 Without RS-485							R Z			
Programming Cable	With - PRKAB 601 Without - PRKAB 601								C Z		

Ordering Example – CP41-P38F75F1DRZ00 – Rish CON P, Programmable power transducer, 3Phase 4Wire, 100...500VAC, 1...5A, Aux 24-60 VAC/DC, 1 O/P, With display, With RS485, Without - PRKAB 601

Analog DC output options as below, to be specified while ordering only

Current Output	Voltage Output	DIP Option
Standard Ranges		
0/4.....20 mA	0.....10 V	Yes
-20...0...20mA	-10...0...10mA	
Optional factory set ranges		
0.....10 mA	0.....5 V	No
0.....5 mA	0.....2.5 V	No
0.....2.5 mA	0.....1 V	No
0.....1 mA		

Note:

1. End value of output can not be changed onsite.
2. -20...0...20mA and -10...0...10V output ranges are not applicable for Apparent power.



Measure



Control



Record



Analyze



RISHABH



Measure



Control



Record



Analyze

RISHABH INSTRUMENTS PVT. LTD.

Domestic (India): +91 253 2202028/99 | marketing@rishabh.co.in

International: +91 253 2202004/06/08/99 | global@rishabh.co.in

www.rishabh.co.in