

DATASHEET APMSXXG-ULN Specification v1.61

Multi-Channel RF and MW Signal Generators
300 kHz to 6, 12, 20, 33 and 40 GHz



Document size:

1 (one) title page
17 (seventeen) content pages

DEFINITIONS

- The specifications in the following pages describe the warranted performance of the instrument for 23 ± 5 °C after a 30-minute warm-up period

Typical: Expected mean values, not warranted performance

Min and max: Parameter range that is guaranteed by product design, and/or production tested. Warranted performance specifications include guard-bands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions.

INTRODUCTION

- **A compact, 300 kHz to 6, 12, 20, 33, or 40 GHz ultra-low phase noise, 25 μ s phase coherent switching, multi-channel signal generator**

The APMSXXG-ULN is a phase-coherent, multi-channel, high output power, ultra-fast switching and ultra-low phase noise signal generator with a frequency range from 300 kHz to 6, 12, 20, 33 or 40 GHz. It is ideally suited for a wide range of applications, where good signal quality, accurate and wide output power ranges, and very stable phase coherence among all channels are required. Excellent phase noise is combined with good spurious, harmonic rejection and optionally leading-edge switching speed of 25 μ s.

A high-stability OCXO reference provides excellent frequency accuracy and stability. The generator accepts a wide range of external references including the commonly used 10 and 100 MHz for higher phase synchronization, and a flexible reference choice in the range of 1-250 MHz for those applications with customer- or system-specific reference frequencies. Moreover, the APMSXXG-ULN features a pair of ANAPICO-specific high-frequency CLK ports (one input and one output) that enables excellent phase synchronization among the outputs from multiple APMSXXG-ULN modules.

The APMSXXG-ULN comes in a standard 19 inch 1U (up to 4 channels) rack-mountable module form and offers various control interfaces like USB, LAN or GPIB. Each interface allows easy and fast communication using SCPI 1999 command set. Remote control of the instrument can be quickly attained from any host system. A customer-supplied application programming interface (API) or programming examples for Matlab, Labview, C++ and other commercially available tools make the control implementation very straightforward.

SPECIFICATIONS

Signal Specifications

PARAMETER	MIN	TYPICAL	MAX	NOTE
Frequency Range	300 kHz		6 GHz	APMS06G-ULN
	300 kHz		12 GHz	APMS12G-ULN
	300 kHz		20 GHz	APMS20G-ULN
	300 kHz		33 GHz	APMS33G-ULN
	300 kHz		40 GHz	APMS40G-ULN
Resolution		<0.001 Hz		
Phase Range	0 deg		360 deg	Individually adjustable per channel
Phase Resolution		0.1 deg		
Switching Speed		1.5 ms		after SCPI command received
CW Mode		500 μs		
Sweep / List Mode		500 μs		
		25 μs		Option FS
SSB Phase noise at 1 GHz (max output power; ALC Off)				See plots/tables on Page 12
at 10 Hz from carrier		-87 dBc/Hz		Option LN
at 1 kHz from carrier		-100 dBc/Hz		
at 100 kHz from carrier		-130 dBc/Hz		
Output Power Level APMS6/12/20G				
< 10MHz	-20 dBm		+20 dBm	
10 MHz to 6GHz	-20 dBm		+25 dBm	
6 GHz to 18 GHz	-20 dBm		+23 dBm	
18 GHz to 20 GHz	-20 dBm		+20 dBm	
Output Power Level APMS33G & 40G	-20 dBm		+18 dBm	
Output Power Level APMS6/12/20G				Option PE4
< 12 GHz	-80 dBm		+20 dBm	
12 GHz to 15GHz	-80 dBm		+18 dBm	
15 GHz to 20 GHz	-80 dBm		+15 dBm	
> 20 GHz	-80 dBm		+12 dBm	
Output Power Level APMS33G & 40G				Option PE4
10 MHz to 20 GHz	-50 dBm		+19 dBm	
20 to 33 GHz	-50 dBm		+16 dBm	
> 33 GHz	-50 dBm		+ 15 dBm	
Power Resolution		0.01 dB		
Thermal Drift		0.015 dB/°C		
Power Level Uncertainty				
<6 GHz		0.25 dB	0.8 dB	-15 to +15 dBm -60 to -15 dBm or >15 dBm
6 to 12.75 GHz		0.3 dB	0.9 dB	-15 to +15 dBm -60 to -15 dBm or >15 dBm
12.75 to 26 GHz		0.3 dB	1.0 dB	-15 to +15 dBm -60 to -15 dBm or >15 dBm
26 to 40 GHz		0.4 dB	1.2 dB	-15 to +15 dBm -50 to -15 dBm or >15 dBm
		4 dB		<-60 dBm
Reverse Power Protection				
DC Voltage			±10 V	
RF Power			26 dBm	

PARAMETER	MIN	TYPICAL	MAX	NOTE
Output impedance		50 Ohms		
VSWR		1.8		
Harmonic spurious				At +5 dBm output power

10 to 200 MHz		-30 dBc	-20 dBc	
200 MHz to 6 GHz		-40 dBc	-30 dBc	
6.5 to 12.75 GHz		-35 dBc	-30 dBc	
12.75 to 20 GHz		-45 dBc	-30 dBc	
20 to 40 GHz		-40 dBc	-30 dBc	
Non-harmonic spurious				> 10 kHz offset
<1.2 GHz		-90 dBc	-85 dBc	
1.2 to 2.5 GHz		-92 dBc	-88 dBc	
2.5 to 5 GHz		-87 dBc	-82 dBc	
5 to 10 GHz		-80 dBc	-75 dBc	
10 to 20 GHz		-75 dBc	-70 dBc	
20 to 40 GHz		-67 dBc		
Sub-Harmonics				
< 5GHz		-75 dBc	-70 dBc	
5-20 GHz		-70 dBc	-65 dBc	
> 20GHz		-55 dBc		
Channel to channel performance				
Isolation				
<3 GHz	90 dB			
3 to 6.5 GHz	70 dB	80 dB		
>6 GHz		See plot		
Relative Phase Stability				5 hours, 5GHz
Between channels		3 mrad		
Between synchronized devices		5 mrad		
Phase coherent switching				
Phase mismatch at outputs		15 ps		



Modulation Capabilities (Option MOD)


PARAMETER	MIN	TYPICAL	MAX	NOTE
Pulse Modulation				
Modulation Source		Internal/ External		
External input amplitude	TTL			
Pulse rise/fall time		10 ns		
On/off ratio		90 dB 80 dB 75 dB	80 dB 70 dB	Pout > +10 dBm, f<6.5 GHz >6.5 to 18 GHz > 18 GHz
Pulse overshoot			10%	
Pulse delay		20 ns		
Pulse polarity		Normal, inverse		selectable
Internal pulse generator				
Repetition frequency (PRF)	0.1 Hz		50 MHz	= 1/T
Duty cycle	1 % to 99 % in 1% steps			within specified minimum pulse width
Minimum pulse settling range	30 ns		20 s	
Pulse Pattern Modulation & Staggered PRF				Using internal pattern generator
Pulse width	30 ns		5 s	
Programmable pattern length	2		65536	
Duty cycle	0.05%		99.95%	
Pulse width resolution		5 ns		
Pulse period (T) accuracy		0.00005xT+ 3ns		
Pulse width accuracy		0.00005xT+ 5ns		
Pulse width resolution		5 ns		
Pulse jitter		2 ns	5 ns	
Polarity		selectable		
Amplitude Modulation				
Modulation Source		Internal		
Modulation Depth	0%		90%	
Deviation accuracy		2%	4%	1 kHz rate, 30% depth
Deviation resolution		1%		
Distortion (THD)			1%	1 kHz rate, 30% depth
Modulation rate	0.1 Hz		20 kHz	
Modulation waveforms	Sine			

PARAMETER	MIN	TYPICAL	MAX	NOTE
Frequency Modulation				
Modulation source		Internal		
Maximum Frequency deviation (peak)		N · 200 MHz		< 1.25 GHz (N=1) 1.25 GHz to 2.5 GHz (N=0.125) 2.5 GHz to 5 GHz (N=0.25) 5 GHz to 10 GHz (N=0.5) 10 GHz to 20 GHz (N=1) 20 GHz to 40 GHz (N=2)
Deviation accuracy		0.50%	2%	
Distortion (THD)		< 1 %		1 kHz rate, 10 kHz deviation

Modulation rate	0.1 Hz		80 kHz	
Modulation waveforms	Sine			
Phase Modulation				
Modulation Source		Internal		
Phase deviation (peak)	0		$300 \cdot N \cdot \text{rad}$	
Deviation accuracy		0.50%	2%	
Modulation rate	0.1 Hz		80 kHz	
Modulation waveforms	Sine			
Distortion (THD)	< 1%			1 kHz rate & N x rad deviation

Sweeping Capability, Sweep type: linear, logarithmic, random

PARAMETER	MIN	TYPICAL	MAX	NOTE
Sweep Parameters		Frequency, power, phase, list		
Step time (t_{step})	500 μs 25 μs 50 μs		19998 s 19998 s 19998 s	Option FS (2 sync channels) Option FS (3 or 4 sync channels)
Dwell time (t_{dwell})	15 μs		9999 s	
Off time (t_{off})	15 μs		9999 s	
Time resolution		5 ns		
Timing delay (τ_{de})		50 ns		
Transient time (τ_{inv})			15 μs	
Timing accuracy per point		5 ns		

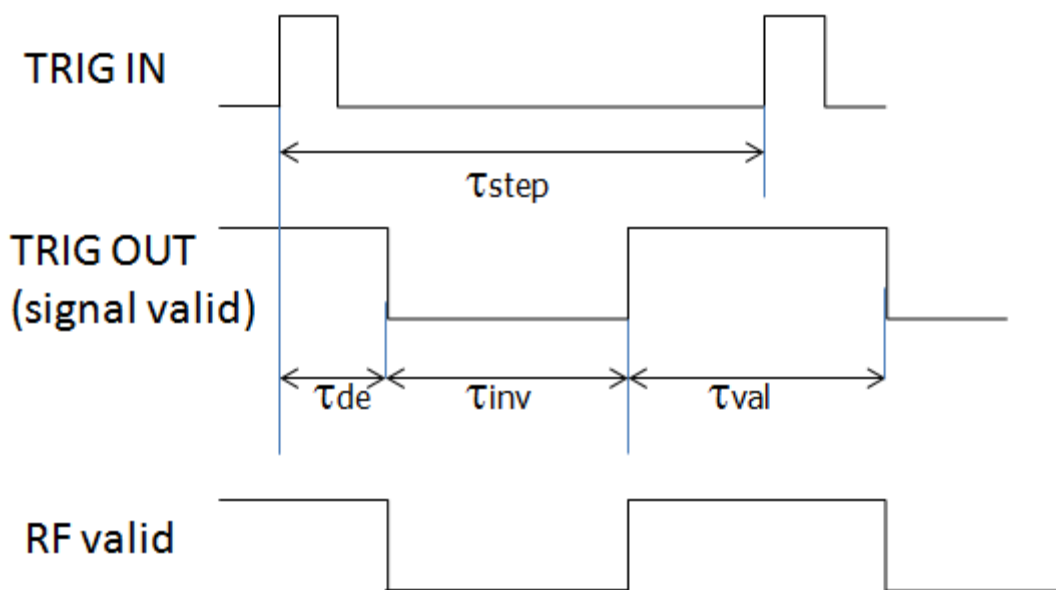

Frequency Reference


PARAMETER	MIN	TYPICAL	MAX	NOTE
Internal reference frequency		100 MHz 10 MHz		Option LN
Temperature stability			±20 ppb	0 to 50 degC
Aging 1st year		0.3 ppm		
Aging per day			0.5 ppb	after 30 days operations
Warm-up time		5 min		
Output of internal reference				
		10 MHz 100 MHz		Option LN
		3 GHz		CLK OUT port
Output power		0 dBm		
Output impedance		50 Ohms		
Bypass Internal reference Input		100 MHz		High phase synchronous mode
Phase Lock to External Reference Bypass Mode	1	10 MHz integer MHz 100 MHz 3 GHz	250	Option VREF CLK IN port
Reference input level				
10 MHz or 1-250 MHz	-5 dBm	0 dBm	+10 dBm	
100 MHz	5 dBm		+13 dBm	
Lock Range				
10 MHz or 1-250 MHz			±1.5 ppm	
100 MHz			>100 ppm	
Reference input impedance		50 Ohms		

Trigger (TRIG IN): Input is TRIG IN at front panel


PARAMETER	MIN	TYPICAL	MAX	NOTE
Trigger Types	Continuous, single (point), gated, gated direction			
Trigger Source	external, bus (LAN, USB)			
Trigger Modes	Continuous free run, trigger and run, reset and run			
Trigger latency		5 ns		
Trigger uncertainty		10 ns		
External Trigger delay	50 ns		40 s	settable
External Delay Resolution		5 ns		
Trigger Modulo	1		255	Execute only on Nth trigger event
Trigger Polarity	Rising, falling			

PERFORMANCE CURVES


Phase Noise with option LN

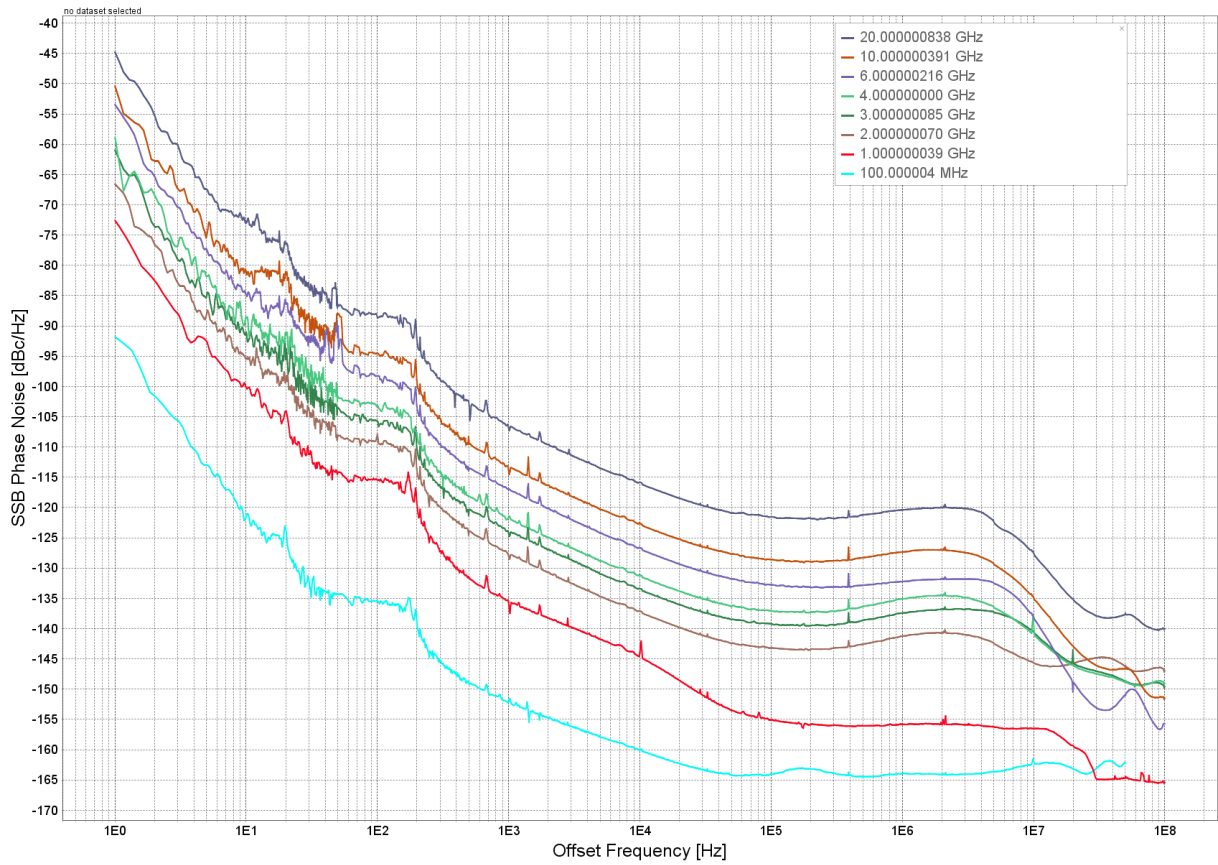


Maximum Output Power APMS20G

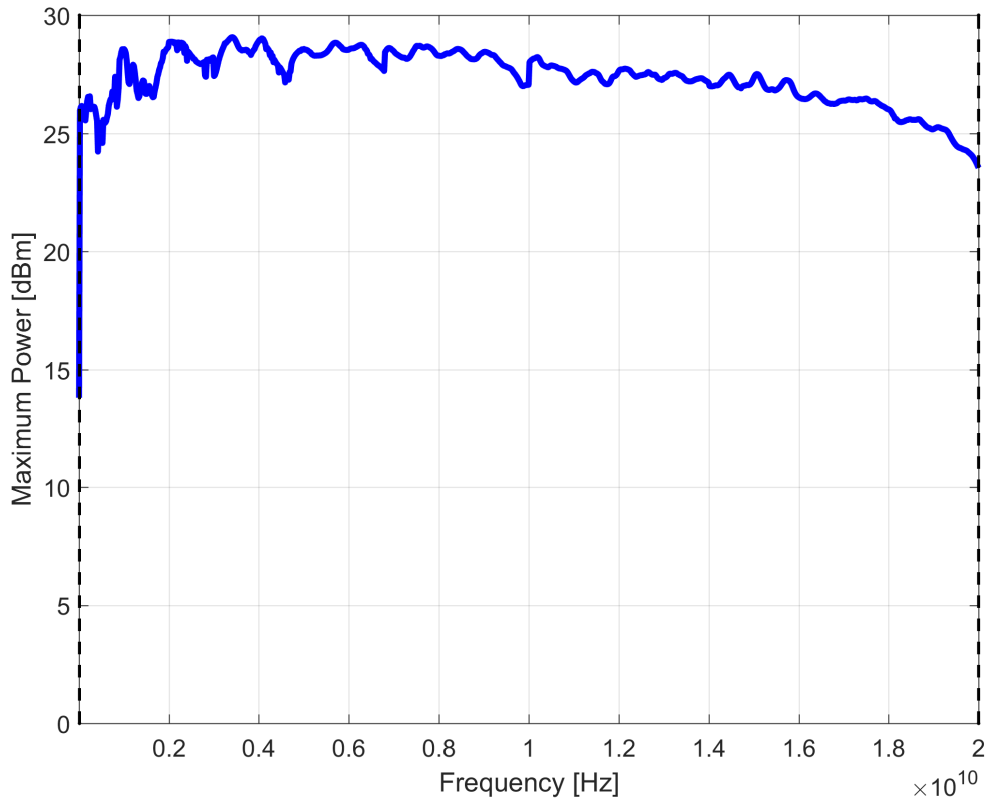


Maximum Output Power APMS20G (with option PE4)

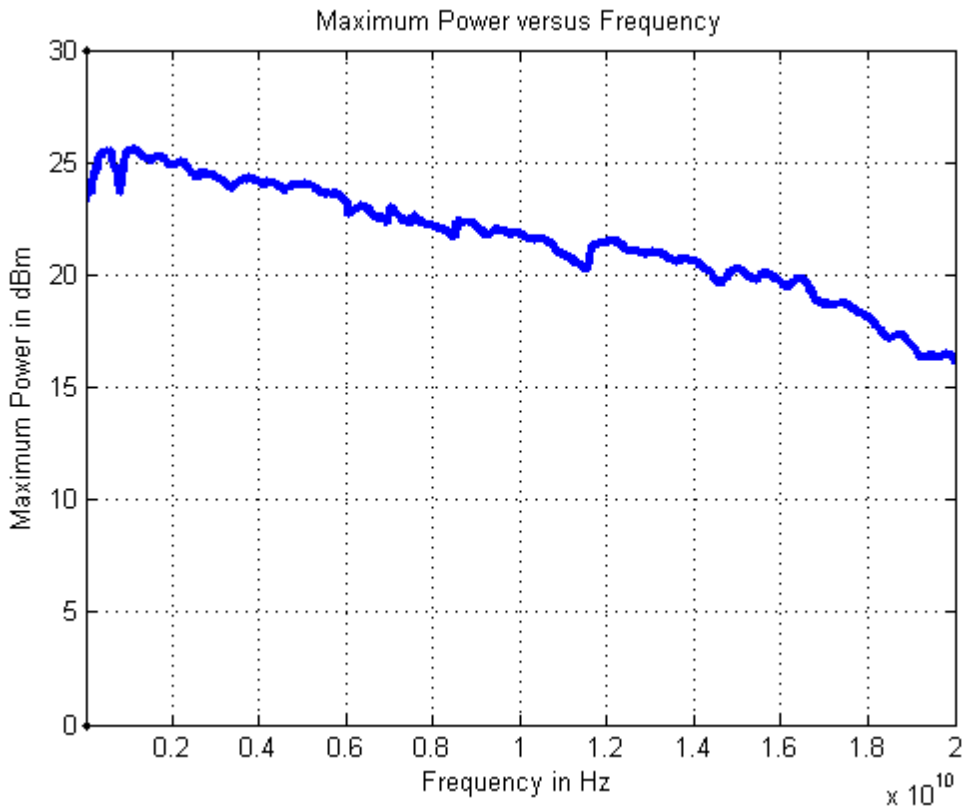


Maximum Output Power APMS40G

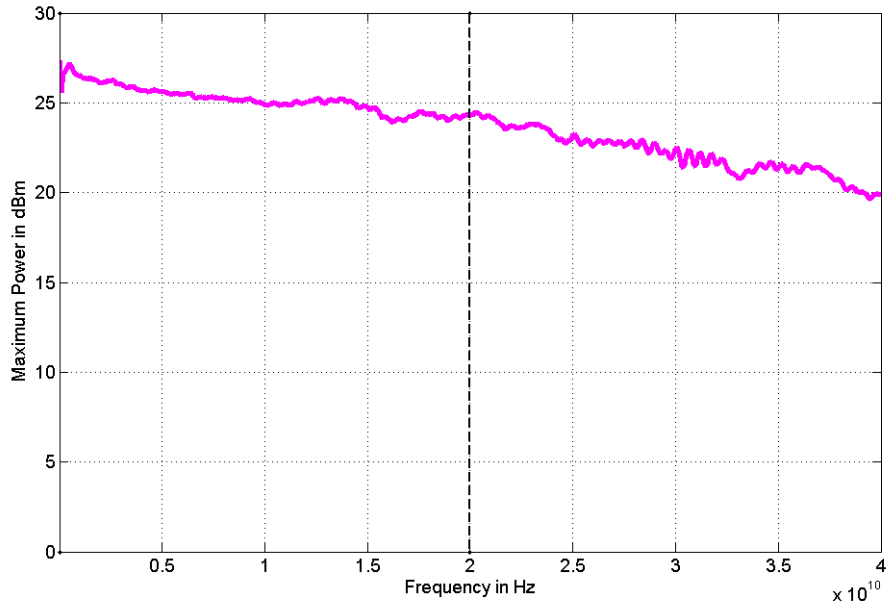


Low frequency response APMS20G (100 kHz to 100 MHz)

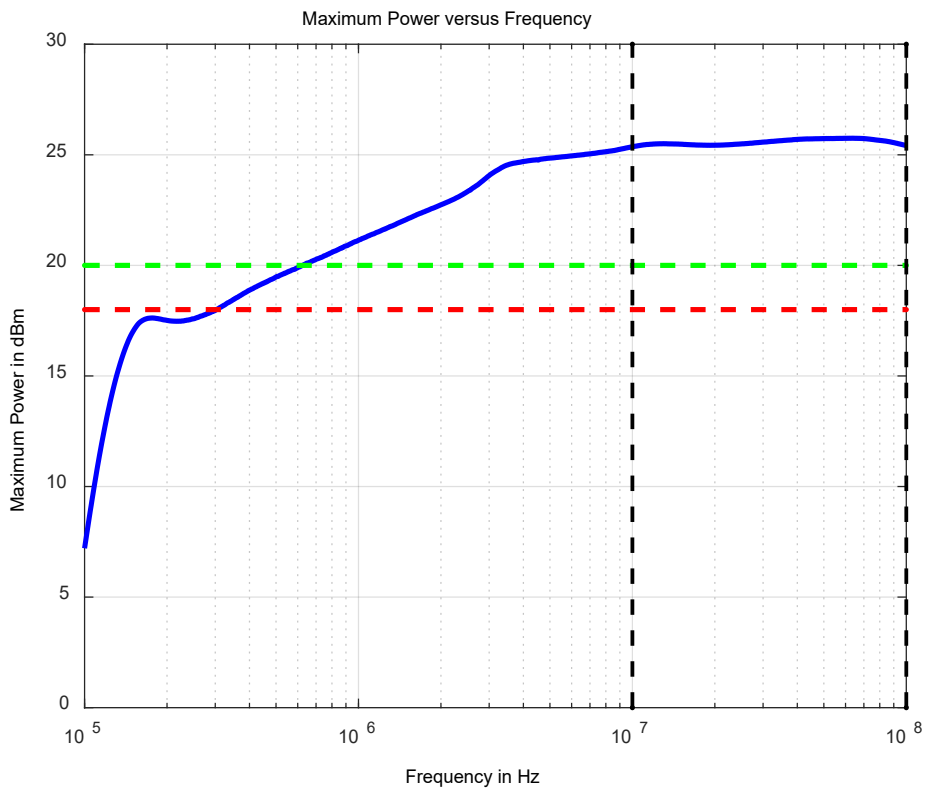


Level error (300 kHz to 20 GHz, APMS20G)

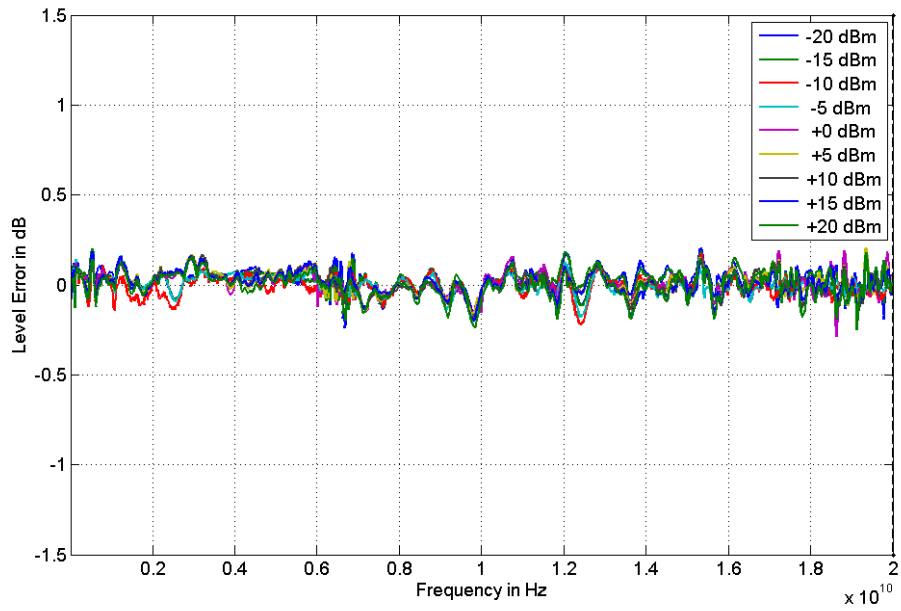


Level linearity

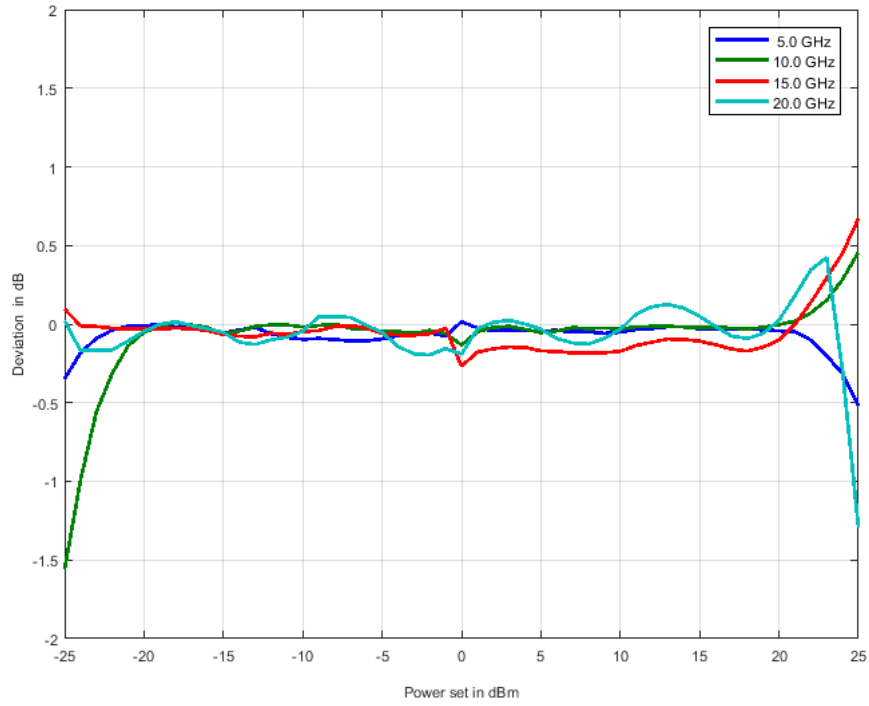


Channel-to-Channel Isolation (P=10 dBm, 10 MHz spacing)

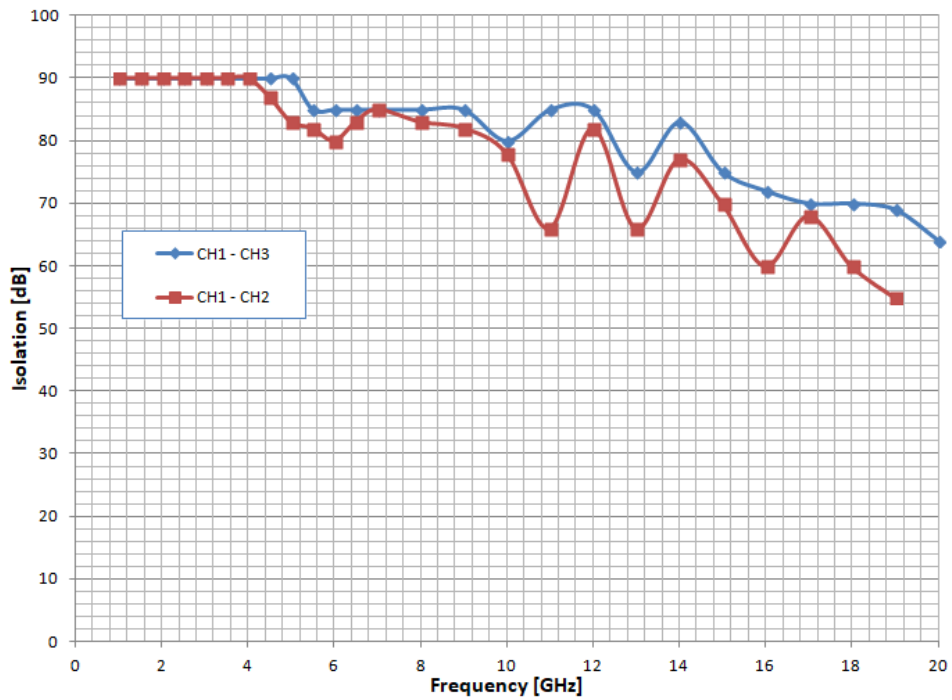

Channel-to-Channel Phase Stability under Different Test Conditions

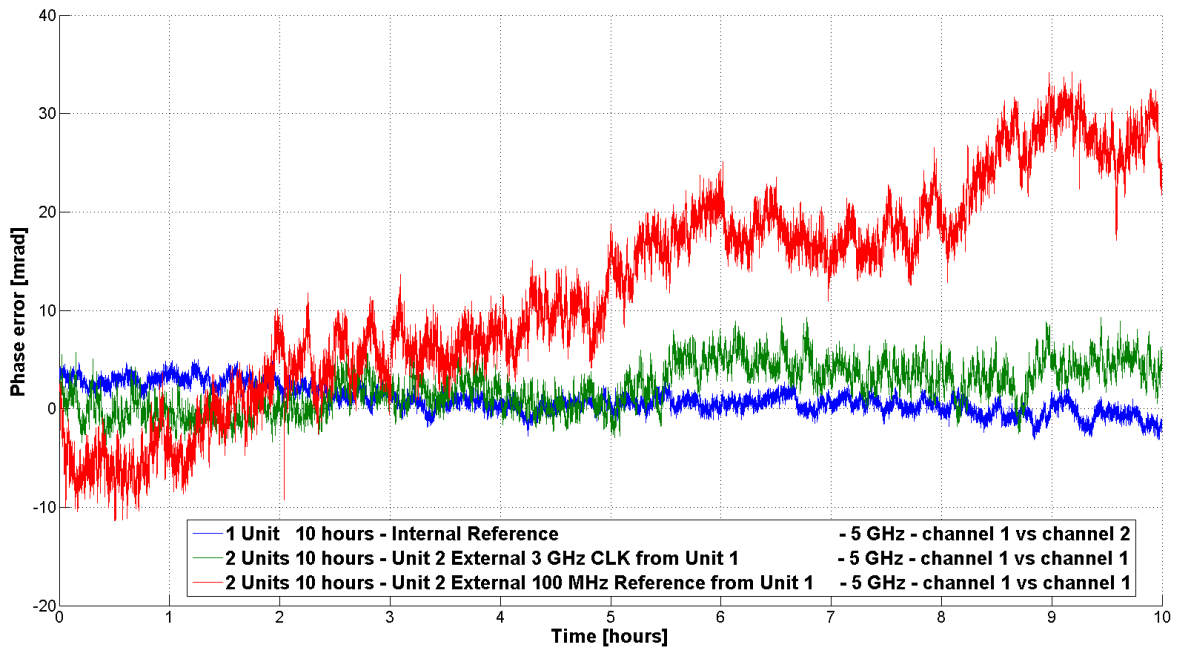


Connectors (Front)

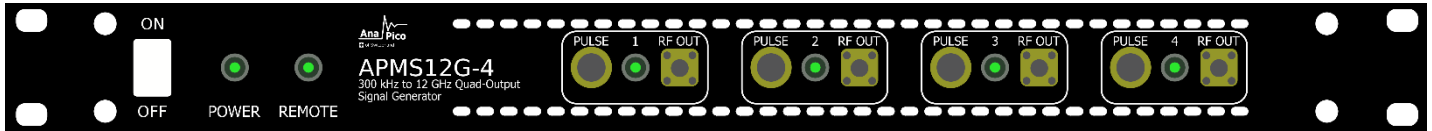

1. RF outputs:
APMS33G, 40G: K (2.92 mm) female
APMS06G, 12G, 20G: SMA female
2. External pulse modulation inputs: BNC female
3. DC power switch

Connectors (Rear)



1. Unit-to-unit synchronization signal input (SYNC IN): SMA female
2. Unit-to-unit synchronization signal output (SYNC OUT): SMA female
3. Internal reference input (CLK IN): SMA female
4. External reference output (CLK OUT): SMA female
5. Trigger output: BNC female
6. Trigger input: BNC female
7. Internal reference output (REF OUT): BNC female
8. External reference input (REF IN): BNC female
9. GPIB: IEEE-488.2, 1987 with listen and talk (optional)
10. USB 2.0 device
11. LAN connection: RJ-45
12. FUSE (3.15 A)
13. 100-240 VAC power plug

ORDERING INFORMATION



Host Model No.	Product	Description
APMSXXG-ULN	APMS06G-2-ULN	2-channel 300 kHz to 6 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS06G-3-ULN	3-channel 300 kHz to 6 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS06G-4-ULN	4-channel 300 kHz to 6 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS12G-2-ULN	2-channel 300 kHz to 12 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS12G-3-ULN	3-channel 300 kHz to 12 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS12G-4-ULN	4-channel 300 kHz to 12 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS20G-2-ULN	2-channel 300 kHz to 20 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS20G-3-ULN	3-channel 300 kHz to 20 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS20G-4-ULN	4-channel 300 kHz to 20 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS33G-2-ULN	2-channel 300 kHz to 33 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS33G-3-ULN	3-channel 300 kHz to 33 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS33G-4-ULN	4-channel 300 kHz to 33 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS40G-2-ULN	2-channel 300 kHz to 40 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS40G-3-ULN	3-channel 300 kHz to 40 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG-ULN	APMS40G-4-ULN	4-channel 300 kHz to 40 GHz ultra-low phase noise, fast switching signal generator, 19" 1HU rack-mount module
APMSXXG	option LN	Enhanced close in phase noise and frequency stability
APMSXXG	option PHS	Phase coherent switching
APMSXXG	option FS	Ultra-fast switching speed
APMSXXG	option VREF	Flexible external reference frequency support in range 1 to 250 MHz
APMSXXG	option MOD	Amplitude, Frequency, Phase modulations added.
APMS06/12G	option PE4-12	Electrical step attenuator (6 & 12 GHz version)
APMS20G	option PE4-20	Electrical step attenuator (20 GHz version)
APMS33/40G	option PE4-40	Electrical step attenuator (33 & 40 GHz version)
APMSXXG	option GPIB	GPIB interface
APMSXXG	option WE	One year warranty extension (standard: 2 years)

APMSXXG	option ReCal	Recalibration with test data (recommended: 2 years interval)
----------------	---------------------	--

GENERAL CHARACTERISTICS

Remote programming interfaces:

Ethernet 100BaseT LAN interface
USB 2.0 device
GPIB (IEEE-488.2,1987) with listen and talk (Option GPIB)
Control Language SCPI Version 1999.0

Power requirements: 100 - 240 VAC, 50 or 60 Hz, 160W maximum (80W + 20W per channel)

Environmental: Levels similar to MIL-PRF-28800F Class 3/4



Safety / EMC comply with applicable Safety and EMC regulations and directives.

Weight: ≤ 10.0 kg (21 lbs) net

Dimensions: 19" 1HE enclosure

APMS06/12/20G: 43 mm H x 426 mm W x 460 mm L [1.7 in H x 16.8 in W x 18.1 in L]

APMS33/40G: 43 mm H x 426 mm W x 480 mm L [1.7 in H x 16.8 in W x 18.9 in L]

Document History

Version	Date	Author	Notes
V10	2015-06-15	jk	First release
V1.01	2015-08-15	jk	Updated power ranges
V1.02	2015-09-15	jk	Added harmonic and spurious specs
V1.10	2016-02-15	jk	Refined parameters
V1.11	2016-02-22	jk	Added phase noise plot
V1.20	2016-04-08	jk	Pictures, Sweeping and Trigger information, Dimensions, Options
V1.21	2016-07-12	sd	Replaced pictures with higher resolution
V1.30	2016-07-18	jk	Additional performance data
V1.31	2016-12-02	jk	Added pictures
V1.32	2017-1-09	jk	Frequency stability information added harmonic specs refined
V1.40	2017-2-19	jk	Production release
V1.41	2017-5-30	jk	Power level accuracy refined, phase stability specified
V1.42	2017-7-27	jk	Intra-Pulse Modulation
V1.43	2017-10-27	jk	Updates for 20 GHz model
V1.45	2017-12-5	jk	Updates for 20 GHz model
V1.50	2018-2-5	jk	Updates for option ULN; PHS, IPM
V1.51	2018-3-15	jk	Mode updates on option ULN
V1.52	2018-4-5	jk	Added parameters for reference section
V1.53	2018-5-15	jk	New plots
V1.54	2018-6-25	jk	Ch to ch isolation, phase stability specs
V1.55	2018-7-25	jk	Ref input
V1.56	2018-10-18	MH	Ref inputs / outputs, SYSREF, ordering information
V1.57	2019-02-28	MH	New layout Added option LN and option FS
V1.58	2019-03-07	MH	Corrected Harmonic Values < 200MHz, APMS33/40G enclosure dimensions
V1.59	2019-04-08	MH	Added power consumption, edited Options
v.1.60	2019-05-11	MH	ULN only
v.1.61	2019-06-24	MH	Corrected connectors description

AnaPico Ltd. of Switzerland

Europastrasse 9
8152 Glattbrugg
Switzerland

Phone +41 44 515 55 01
Fax +41 44 440 00 50
Email sales@anapico.com

www.anapico.com
www.anapico.com/downloads/

