



DATASHEET APULN Specification V1.30

Ultra-low noise Microwave Signal Generators

100 kHz to 6, 12.75, 20, 26 and 40 GHz



Document size:

1 (one) title page
17 (seventeen) content pages

DEFINITIONS

The specifications in the following pages describe the warranted performance of the instrument for 23 ± 5 °C after a 30-minute warm-up period

Typical: Expected mean values, not warranted performance

Min and max: Parameter range that is guaranteed by product design, and/or production tested. Warranted performance specifications include guard-bands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions.

INTRODUCTION

• Ultra-low noise Microwave Signal Generator 100 kHz to 6, 12.75, 20, 26 and 40 GHz

The APULN is an ultra-low-noise and fast-switching microwave signal generator covering a continuous frequency range from 100 kHz up to 6, 12.75, 20 GHz, 26 or 40 GHz, respectively, with a lower than 0.001 Hz resolution.

The APULN provide an accurately levelled output power range and high spurious suppression. Advanced frequency synthesis combines fastest switching speeds with ultra-low SSB phase noise and fine frequency and power resolution.

The APULN supports analog modulation including pulse and chirp modulation with programmable patterns.

The APULN allows fast digital sweeps including flexible list sweeps, where frequency, power and dwell times can be set individually. A flexible triggering system simplifies synchronization within test environments.

All APULN operate with ultra-stable temperature compensated frequency reference (OCXO) to ensure minimal drift and can be phase-locked to an external reference.

The compact unit allows full front panel control via touch panel display.

FACTS & FIGURES & SPECIFICATIONS

• Signal Specifications

PARAMETER	MIN	TYPICAL	MAX	NOTE
Frequency Range	100 kHz		6 GHz	APULN6
	100 kHz		12.75 GHz	APULN12
	100 kHz		20 GHz	APULN20
	100 kHz		26 GHz	APULN26
	100 kHz		40 GHz	APULN40
Resolution		0.001 Hz		
Phase Resolution		0.01 deg		
Switching Speed		1.5 ms		Valid signal after SCPI received
SCPI CW mode		500 µs		
Sweep / List Mode		20 µs		Option FS
SSB Phase noise at 1 GHz				(see also plots / tables)
at 10 Hz from carrier	-87 dBc/Hz			
at 1 kHz from carrier	-100 dBc/Hz			Option LN
at 20 kHz from carrier	-130 dBc/Hz			
at 100 kHz from carrier	-145 dBc/Hz			
SSB Phase noise at 4 GHz		-74 dBc/Hz		
at 10 Hz from carrier	-90 dBc/Hz			Option LN
at 1 kHz from carrier	-121 dBc/Hz			
at 20 kHz from carrier	-133 dBc/Hz			
at 100 kHz from carrier	-138 dBc/Hz			
SSB Phase noise at 10 GHz		-67 dBc/Hz		
at 10 Hz from carrier	-80 dBc/Hz			Option LN
at 1 kHz from carrier	-113 dBc/Hz			
at 20 kHz from carrier	-124 dBc/Hz			
at 100 kHz from carrier	-130 dBc/Hz			
SSB Phase noise at 40 GHz		-55 dBc/Hz		
at 10 Hz from carrier	-68 dBc/Hz			Option LN
at 1 kHz from carrier	-101 dBc/Hz			
at 20 kHz from carrier	-112 dBc/Hz			
at 100 kHz from carrier	-118 dBc/Hz			
Harmonics (at +5 dBm Pout, w/o PE4) at +15 dBm		-40 dBc -35 dBc -55 dBc	-30 dBc -25 dBc -50 dBc	0.01 to 6 GHz >6GHz Option FILT, >1 GHz
Sub-Harmonics		-75 dBc -70 dBc -55 dBc		<5 GHz 5 - 20 GHz >20 GHz
Non-Harmonic Spurious (> 10 kHz offset)		-90 dBc -92 dBc -90 dBc -84 dBc -80 dBc -70 dBc	-85 dBc -88 dBc -86 dBc -80 dBc -74 dBc -66 dBc	<1.2 GHz 1.2 - 2.5 GHz 2.5 - 5 GHz 5 - 10 GHz 10 - 20 GHz >20 GHz

PARAMETER	MIN	TYPICAL	MAX	NOTE
Output power level				
<10 MHz	-20 dBm		+18 dBm	
0.01 to 6 GHz	-20 dBm		+24 dBm	
6 to 12.75 GHz	-20 dBm		+23 dBm	
12.75 to 26 GHz	-20 dBm		+20 dBm	
26 to 40 GHz	-20 dBm		+18 dBm	
Output power level (option PE4)				
<10 MHz	-90 dBm		+18 dBm	
0.01 to 6 GHz	-90 dBm		+21 dBm	
6 to 12.75 GHz	-90 dBm		+20 dBm	
12.75 to 20 GHz	-80 dBm		+15 dBm	
20 to 40 GHz	-55 dBm		+10 dBm	
Power Resolution		0.01 dB		
Power Level Uncertainty				
<6 GHz		0.25 dB	0.8 dB 1.2 dB	-15 to +15 dBm -60 to -15 dBm or >15 dBm
6 to 12.75 GHz		0.3 dB	0.9 dB 1.3 dB	-15 to +15 dBm -60 to -15 dBm or >15 dBm
12.75 to 26 GHz		0.3 dB	1.0 dB 1.6 dB	-15 to +15 dBm -60 to -15 dBm or >15 dBm
26 to 40 GHz		0.4 dB	1.2 dB 2.5 dB	-15 to +15 dBm -60 to -15 dBm or >15 dBm
Reverse Power Protection				
DC Voltage			±10 V	
RF Power			30 dBm	
Output impedance		50 Ohms		
VSWR		1.4	1.8	


Modulation Capabilities (Option MOD)

PARAMETER	MIN	TYPICAL	MAX	NOTE
Pulse Modulation				
Modulation source		Internal/ External		
External input amplitude		TTL		
Pulse rise/fall time		10 ns		
On/off ratio (high ON/OFF mode)		80 dB 75 dB	70 dB 65 dB	Pout > +10 dBm, f<18 GHz > 18 GHz
Pulse overshoot			10%	
Pulse delay		20 ns		
Pulse polarity		Normal, inverse		selectable
Internal pulse generator				
Repetition frequency (PRF)	0.1 Hz		50 MHz	= 1/T
Duty cycle	1 % to 99 % in 1% steps			within specified minimum pulse width
Minimum pulse settling range	30 ns 10 ns		20 s 20 s	Option FS
Pulse Pattern Modulation & Staggered PRF				Using internal pattern generator
Programmable pattern length	2		65536	
Duty cycle	0.05%		99.95%	
Pulse width resolution		5 ns		
Pulse period (T) accuracy		0.00005xT+ 3ns		
Pulse width accuracy		0.00005xT+ 5ns		
Pulse width resolution		5 ns		
Pulse jitter		2 ns	5 ns	
Polarity		selectable		
Amplitude Modulation				
Modulation source		Internal/ (External)		
Modulation Depth	0%		90%	
Deviation accuracy		2%	4%	1 kHz rate, 30% depth
Deviation resolution		1%		
Distortion (THD)			1%	1 kHz rate, 30% depth
Modulation rate	0.1 Hz		30 kHz	
Modulation waveforms	Sine			
Chirped Pulse Modulation				Option FS & MOD
Modulation source		Internal		
Chip span	1 Hz		3 %	of RF
Chip rate	1 Hz		100 kHz	
Pulse width	10 µs		1 sec	
Chip slope			0.5% / µs	of RF
Chip mode		Linear, exponential, up, down, bidirectional		
PARAMETER	MIN	TYPICAL	MAX	NOTE
Frequency Modulation				
Modulation source		Internal/		

	(External)		
Maximum Frequency deviation (peak)	N · 200 MHz		< 1.25 GHz (N=1) 1.25 GHz to 2.5 GHz (N=0.125) 2.5 GHz to 5 GHz (N=0.25) 5 GHz to 10 GHz (N=0.5) 10 GHz to 20 GHz (N=1) 20 GHz to 40 GHz (N=2)
Deviation accuracy	0.50%	2%	
Distortion (THD)	< 1 %		1 kHz rate, 10 kHz deviation
Modulation rate	0.1 Hz	80 kHz	
Modulation waveforms	Sine		
Phase Modulation			
Modulation source	Internal/ (External)		
Phase deviation (peak)	0	300 · N· rad	
Deviation accuracy	0.50%	2%	
Modulation rate	0.1 Hz	80 kHz	
Modulation waveforms	Sine		
Distortion (THD)	< 1%		1 kHz rate & N x rad deviation

• Sweeping Capability, Sweep type: linear, logarithmic, random

PARAMETER	MIN	TYPICAL	MAX	NOTE
Sweep Parameters	Frequency, power, phase, list			
Step time (t_{step})	500 µs 20 µs		19998 s 19998 s	Option FS
Settling time (t_{inv})			15 µs	To stabilize phase and amplitude, depends on frequency step
Trigger latency (t_{de})			1 µs	Time from trigger to initiate signal transient
Time resolution		5 ns		
Timing accuracy per point		5 ns		

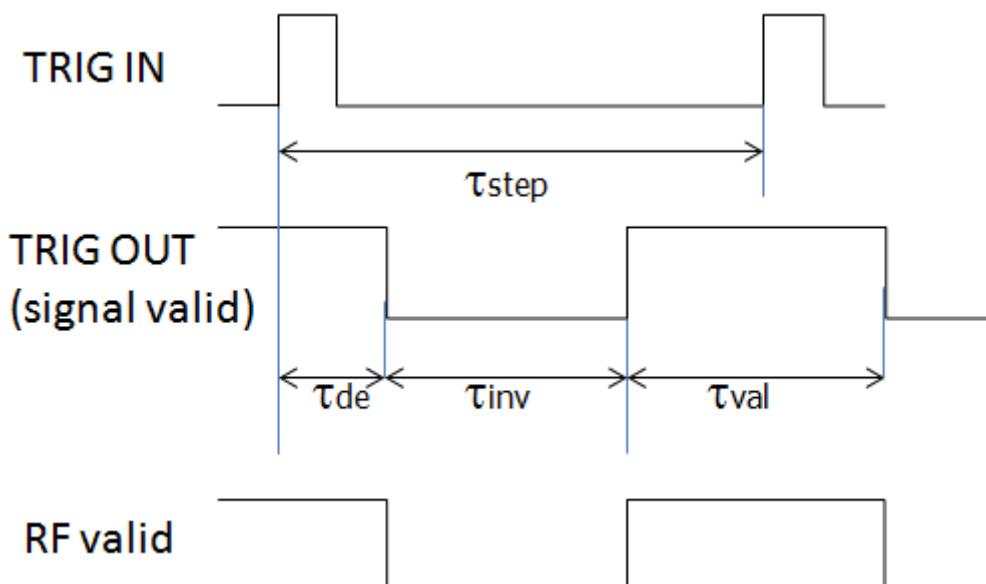

Frequency Reference


PARAMETER	MIN	TYPICAL	MAX	NOTE
Internal reference frequency		100 MHz 10 MHz		Option LN
Temperature stability			±100 ppb ±30 ppb	0 to 50 degC Option LN
Aging 1st year			1 ppm 0.3 ppm	Option LN
Aging per day			5 ppb 0.5 ppb	after 30 days operations Option LN
Warm-up time		5 min		
Output of internal reference		100 MHz		
		10/100 MHz		Option LN
Output power		0 dBm		
Output impedance		50 Ohms		
Bypass Internal reference Input		100 MHz		High phase synchronous mode
Phase Lock to External Reference	5	10 MHz integer MHz 100 MHz	250	Option VREF
Bypass Mode				
Reference input level				
10 MHz or 1-250 MHz	-5 dBm	0 dBm	+10 dBm	
100 MHz	5 dBm		+15 dBm	
Lock Range				
10 MHz or 1-250 MHz			±1.5 ppm	
100 MHz			>100 ppm	
Reference input impedance		50 Ohms		

Trigger (TRIG IN): Input is TRIG IN at front panel

PARAMETER	MIN	TYPICAL	MAX	NOTE
Trigger Types		Continuous, single (point), gated, gated direction		
Trigger Source		external, bus (LAN, USB)		
Trigger Modes		Continuous free run, trigger and run, reset and run		
Trigger latency		5 ns		
Trigger uncertainty		10 ns		
External Trigger delay	50 ns		40 s	settable
External Delay Resolution		5 ns		
Trigger Modulo	1		255	Execute only on Nth trigger event
Trigger Polarity		Rising, falling		

TYPICAL PERFORMANCE CURVES

SSB Phase Noise Performance with option LN

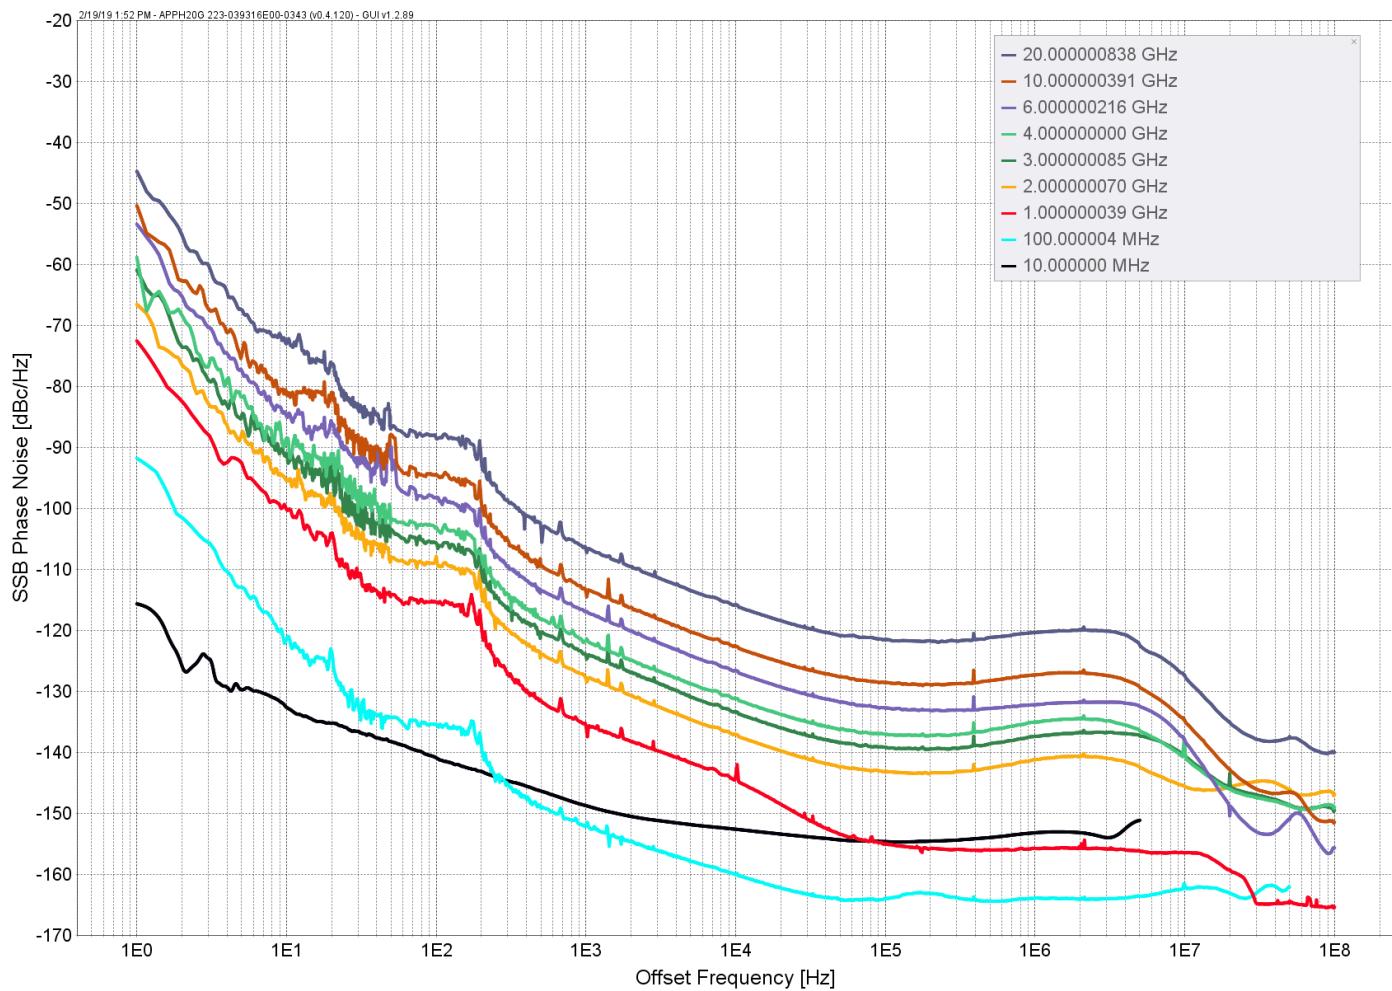


Typical SSB Phase Noise [dBc/Hz], CW, level = 20 dBm, Option LN

Offset → RF ↓	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	floor
10 MHz	-116	-133	-141	-149	-153	-155	-154	-155
100 MHz	-96	-121	-137	-148	-157	-162	-162	-162
1 GHz	-76	-100	-120	-132	-142	-153	-156	-165
2 GHz	-70	-94	-114	-125	-135	-143	-143	-155
3 GHz	-66	-90	-110	-122	-132	-139	-139	-151
4 GHz	-64	-88	-108	-118	-129	-137	-137	-151
6 GHz	-60	-84	-104	-115	-124	-132	-133	-151
10 GHz	-56	-80	-100	-111	-121	-129	-129	-151
20 GHz	-50	-74	-94	-105	-116	-123	-123	-150



SSB Phase Noise Performance, without option LN

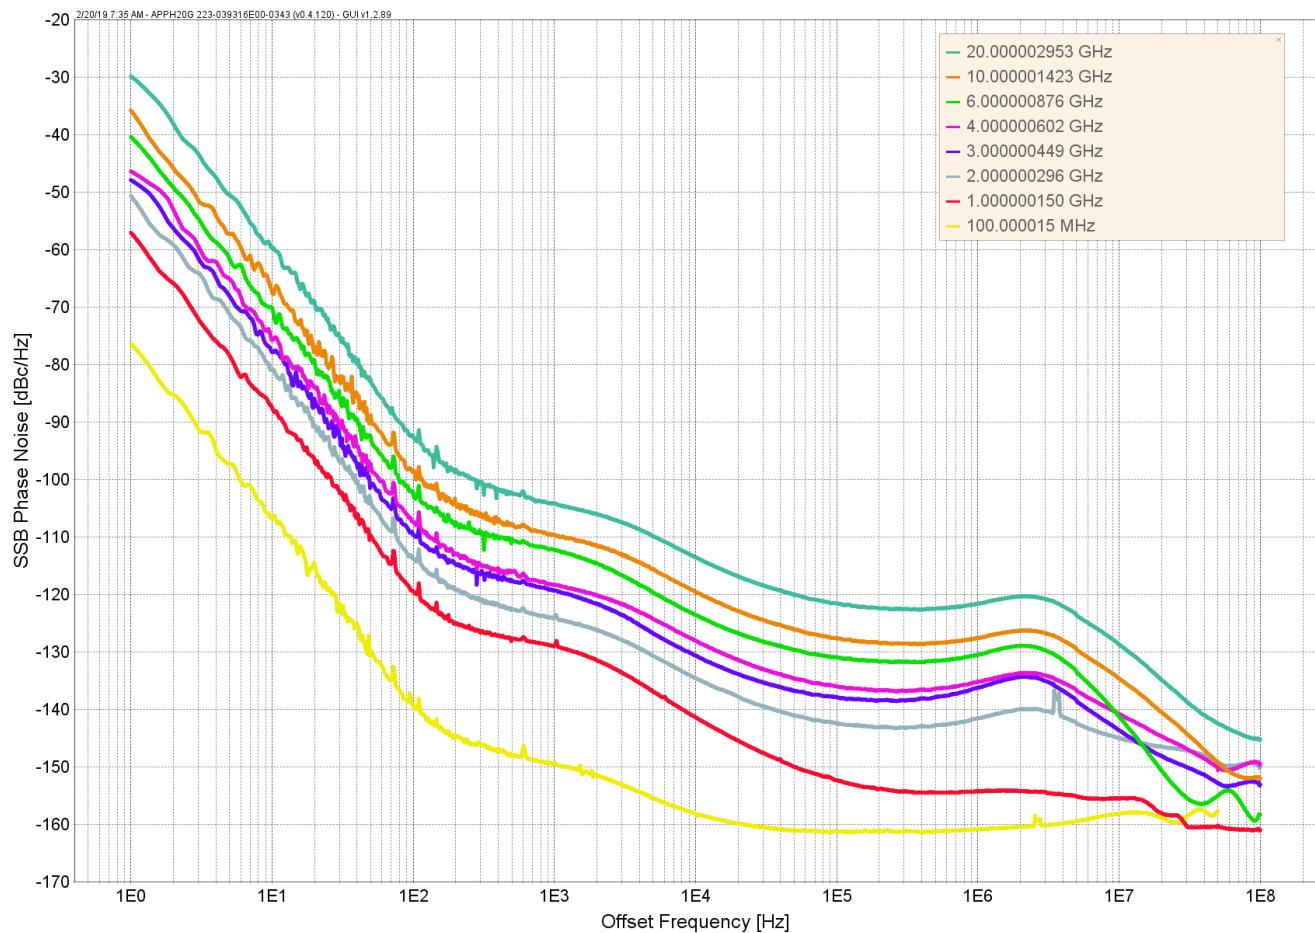


Typical SSB Phase Noise [dBc/Hz], CW, level = 20 dBm, without option LN


Offset → RF ↓	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	floor
10 MHz	No value?	No value?	No value?	-149	-153	-155	-154	-155
100 MHz	-76	-108	-140	-148	-157	-162	-162	-162
1 GHz	-57	-88	-120	-132	-142	-153	-156	-165
2 GHz	-51	-82	-114	-125	-135	-143	-143	-155
3 GHz	-47	-78	-110	-122	-132	-139	-139	-151
4 GHz	-45	-76	-108	-118	-129	-137	-137	-151
6 GHz	-41	-72	-104	-115	-124	-132	-133	-151
10 GHz	-37	-68	-100	-111	-121	-129	-129	-151
20 GHz	-31	-62	-94	-105	-116	-123	-123	-150



Output Power 0.01 to 20 GHz (APULN20)

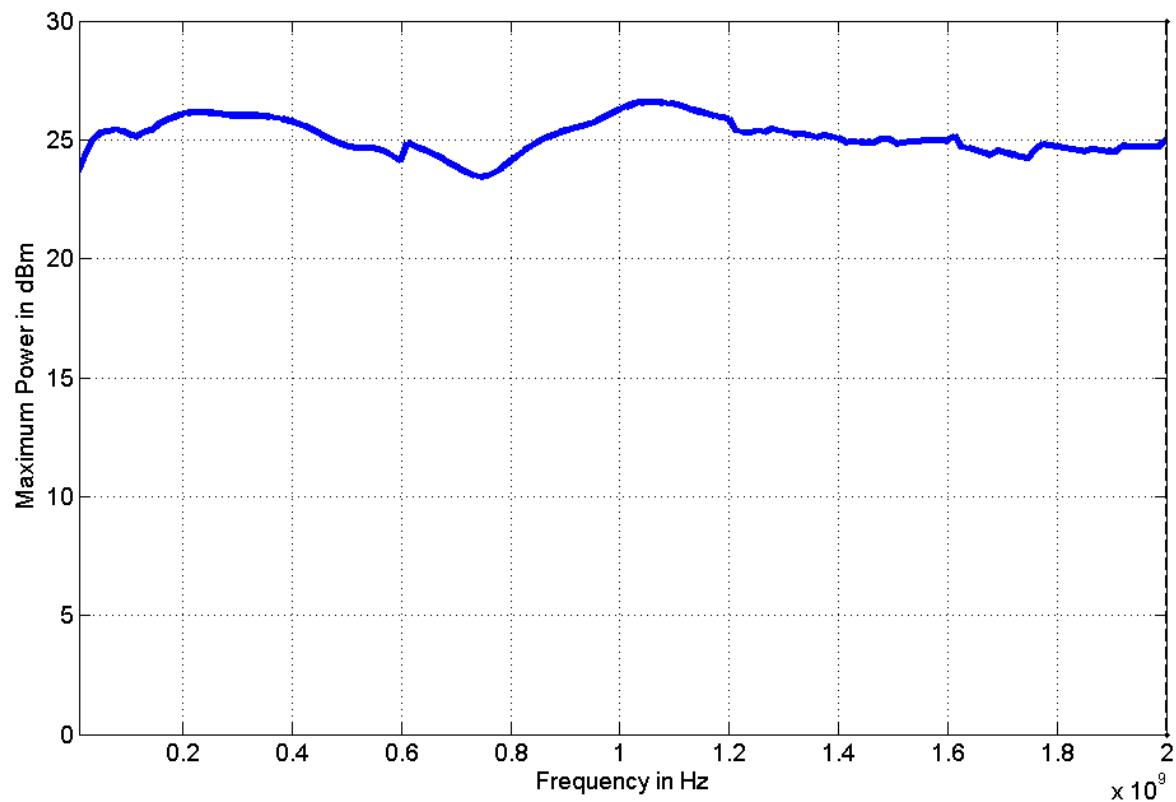


Min & Max Output Power 0.01 to 40 GHz (APULN40)

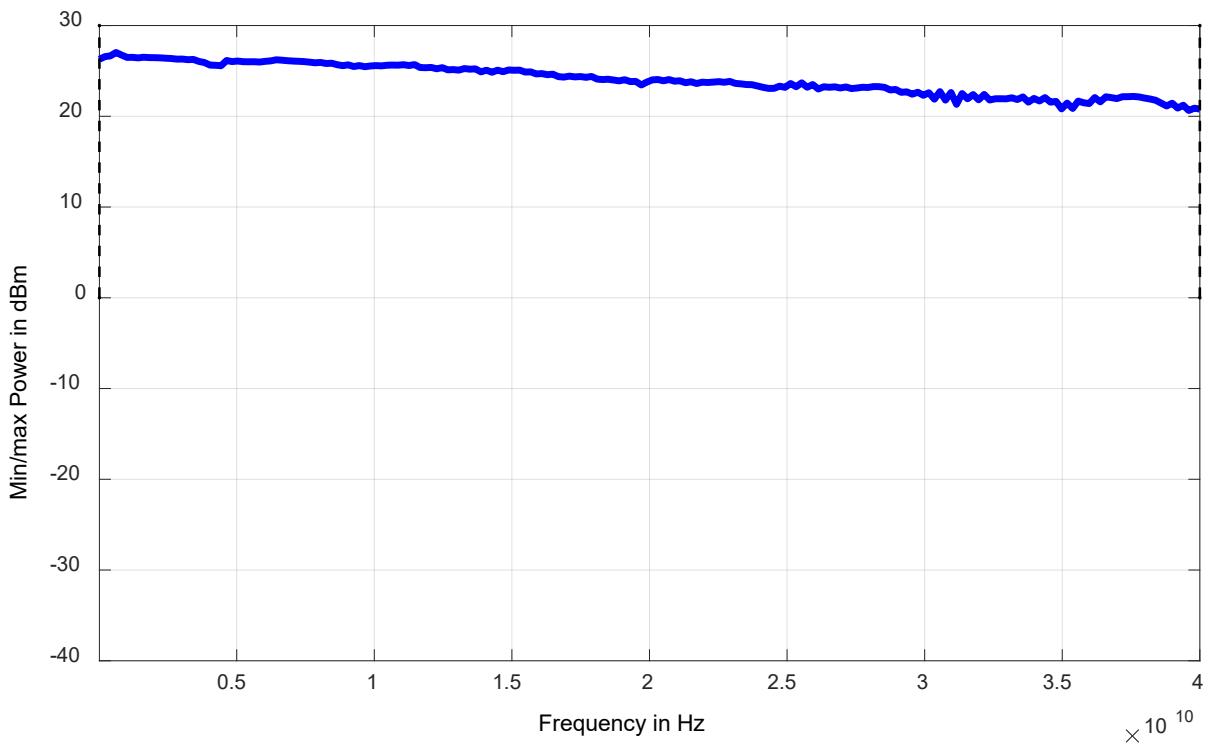





Max Output Power 0.01 to 20 GHz (APULN20 with option PE4)

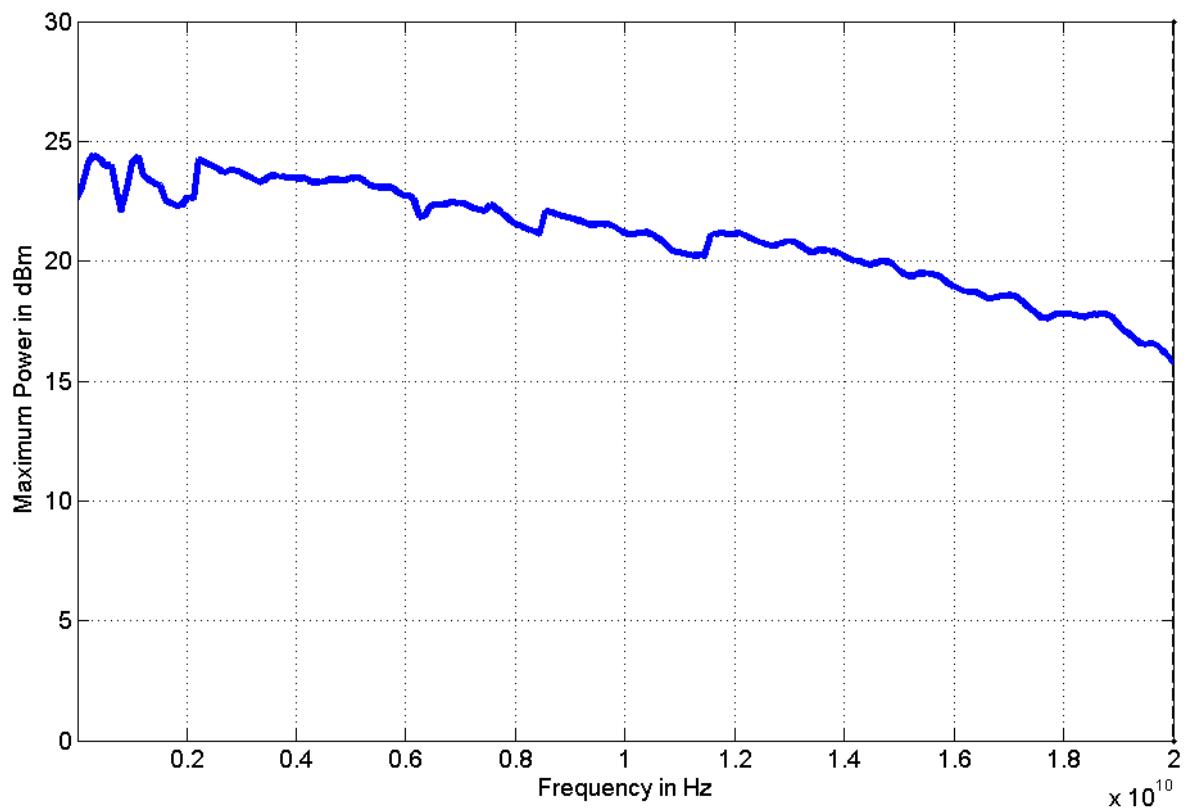


Harmonics (2nd, 3rd at P=+10 dBm)

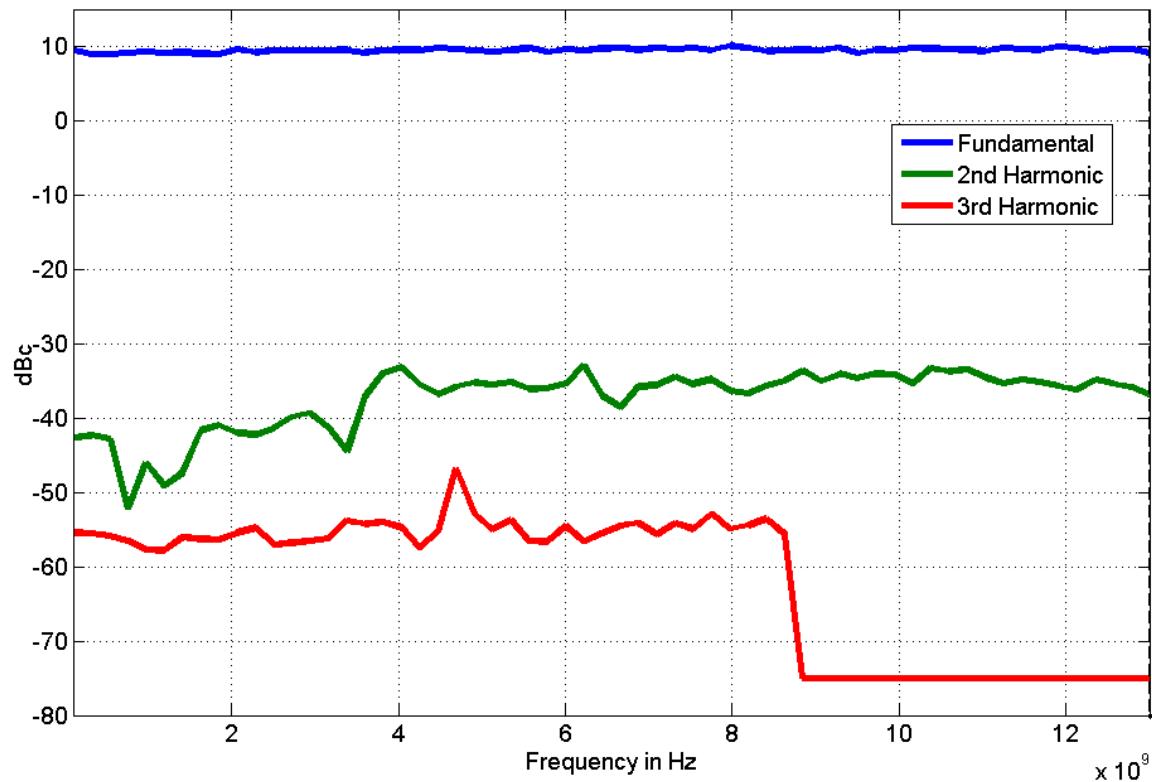


• Typical Frequency Response 0 to 20 GHz at different power levels (APULN20)

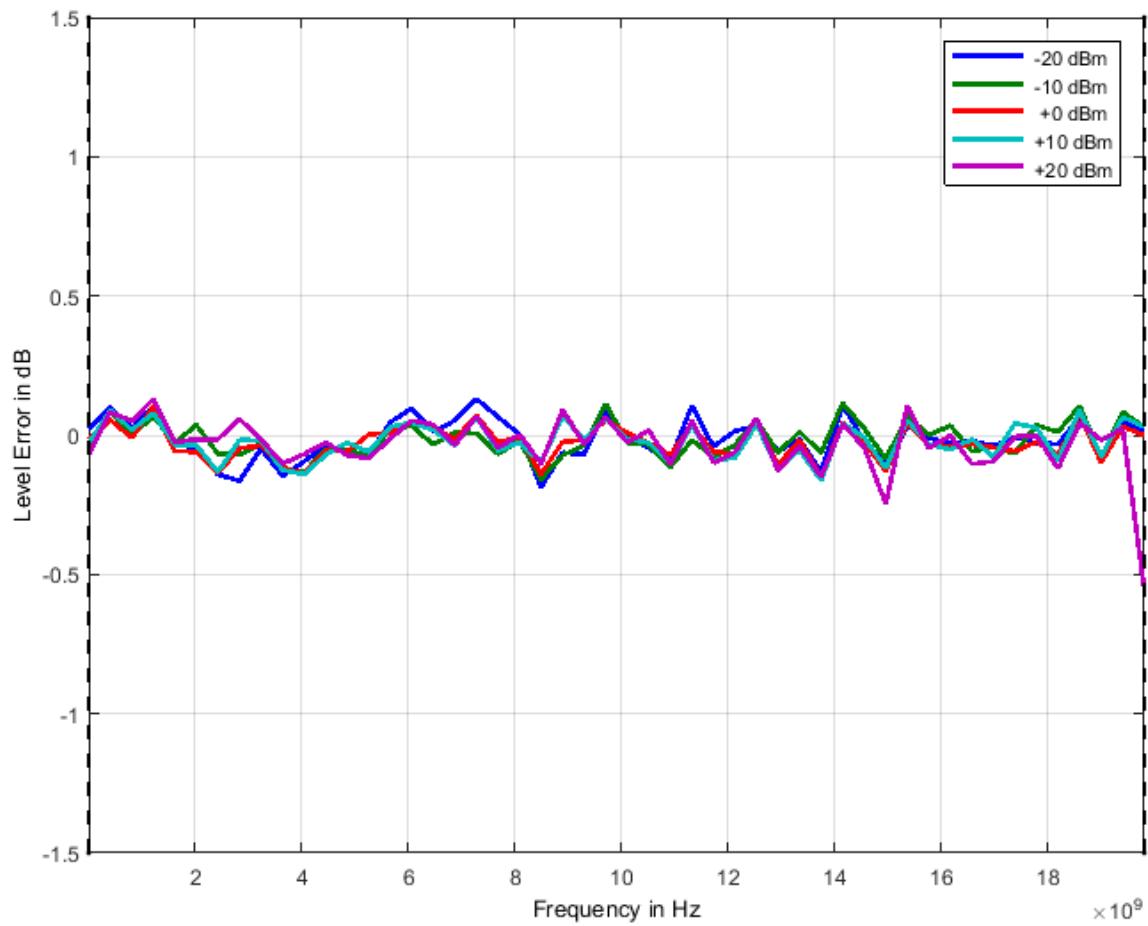


• Typical Output Power Linearity (APULN40)

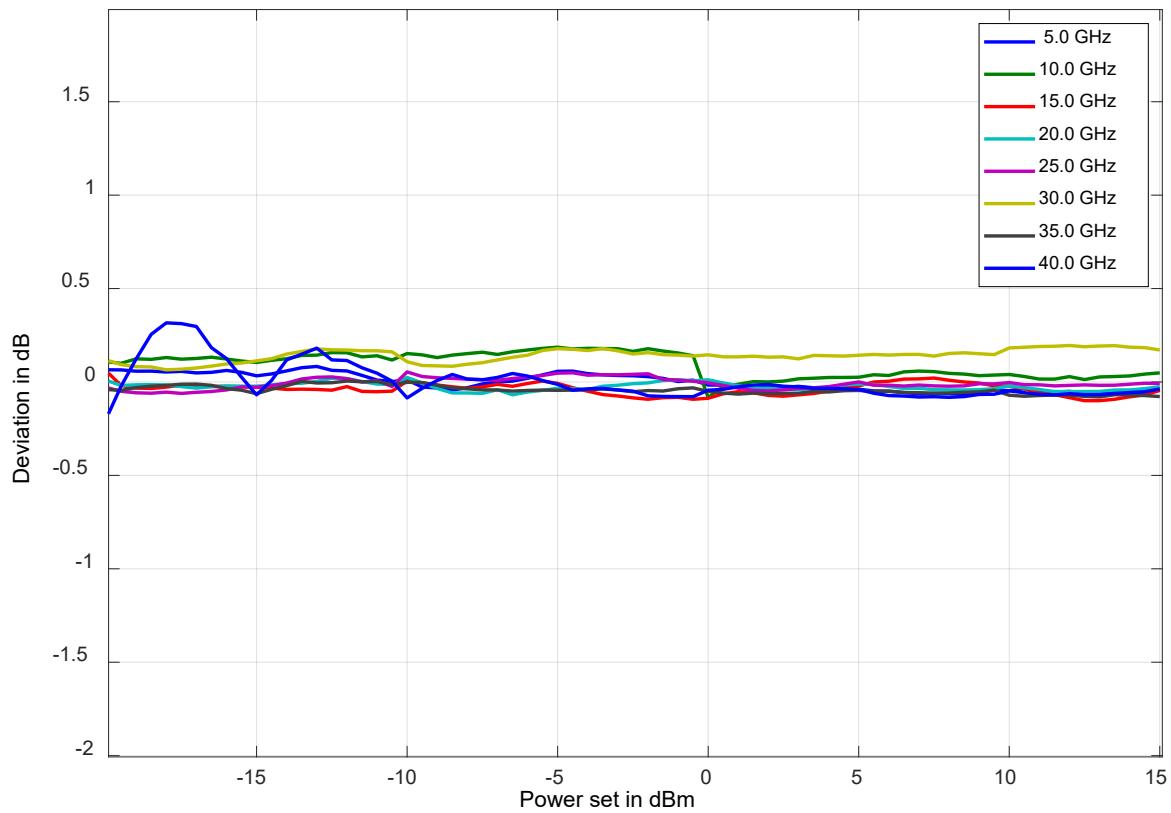


• Typical VSWR (APULN20)

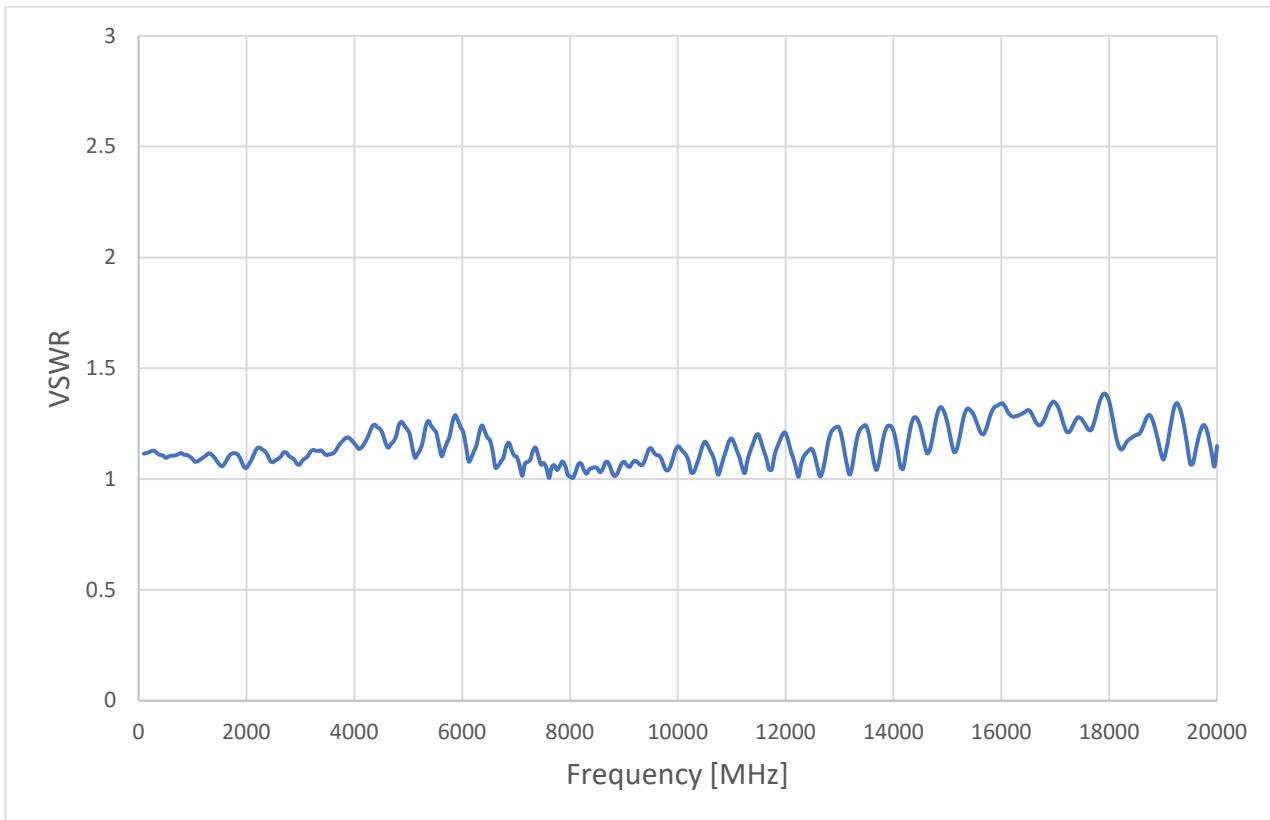

• Internal Pulse Modulation (10 GHz, 40ns period, 15 ns pulse width)

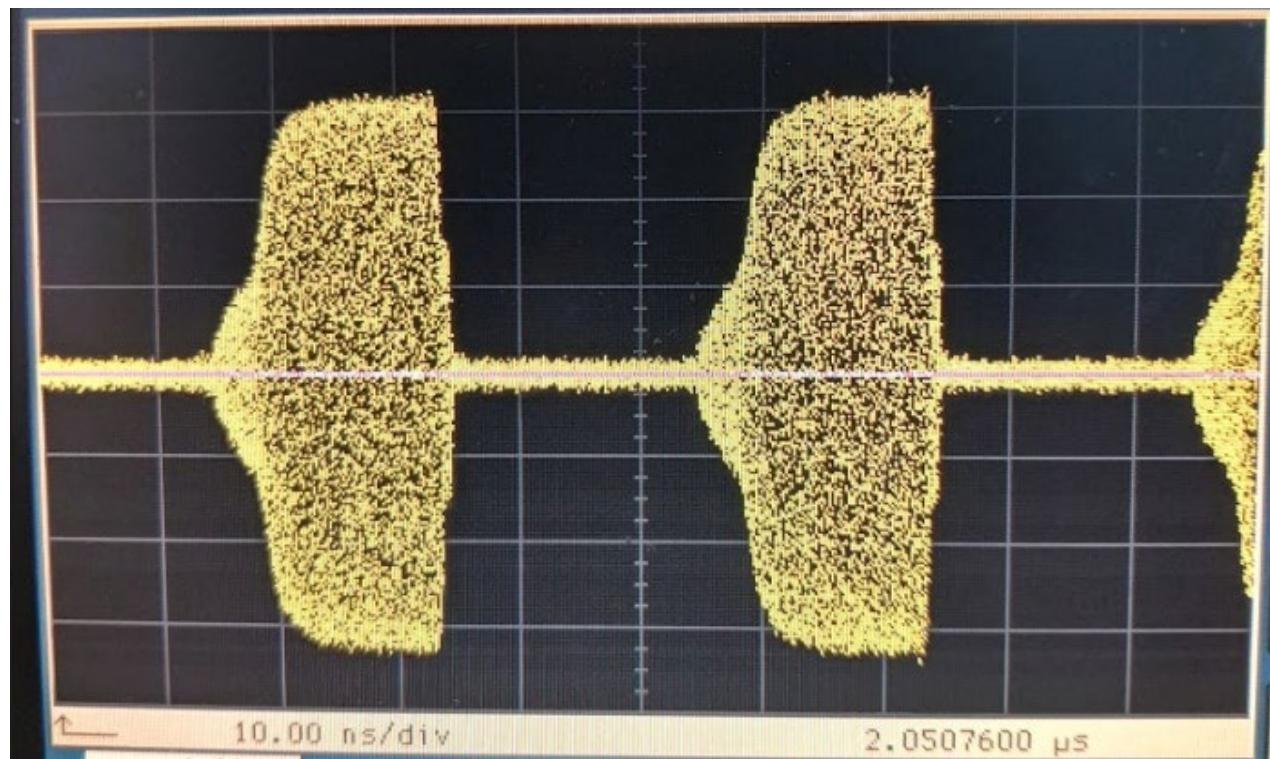

• Internal Pulse Modulation (38.8 GHz, 15ns period, 7 ns pulse width)

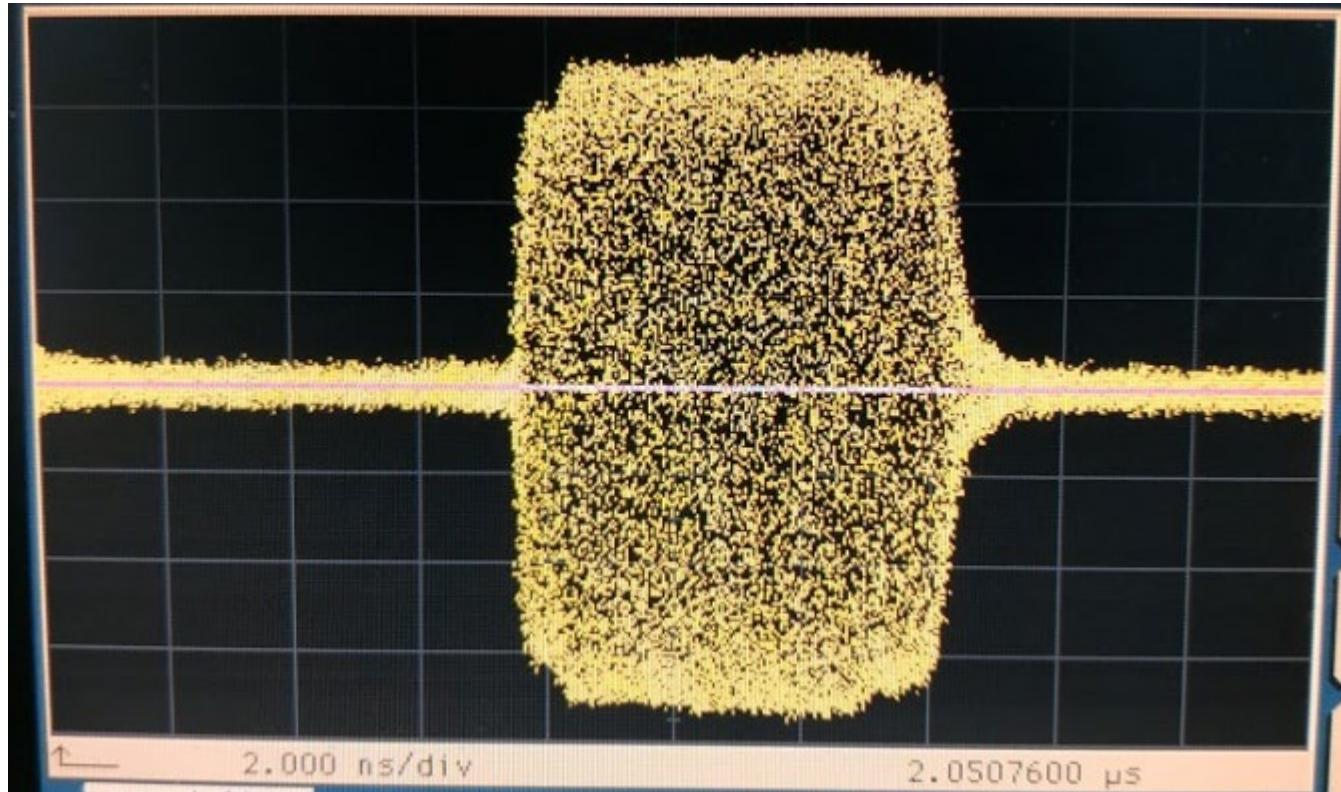

CONNECTORS, IOS


Front panel:

1. RF output:
APULN40: K (2.92 mm) female
APULN06,12,2026: SMA female
2. Rotary knob



Rear panel:

1. TRIG IN: Trigger input: BNC female
2. TRIG OUT: Trigger output: BNC female
3. REF OUT: External reference input: BNC female
4. REF IN: Internal reference output: BNC female
5. MOD IN modulation input for AM/FM/PM: BNC female
6. PULSE IN: Pulse modulation input: BNC female
7. LAN connection: RJ-45
8. USB 2.0 host and device
9. GPIB: IEEE-488.2, 1987 with listen and talk (optional)
10. DC Power plug (24V, 3 A)
11. DC power switch

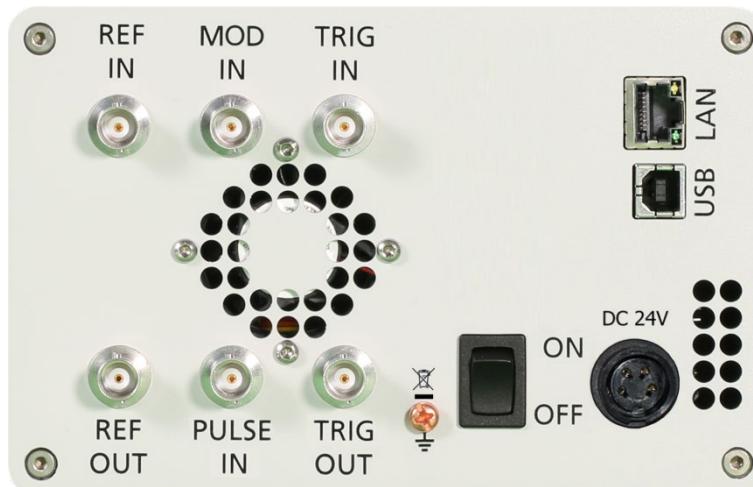

ORDERING INFORMATION

HOST MODEL	PRODUCT	DESCRIPTION
APULN06	APULN06	100 kHz – 6 GHz
APULN12	APULN12	100 kHz – 12.75 GHz
APULN20	APULN20	100 kHz – 20 GHz
APULN26	APULN26	100 kHz – 26 GHz
APULN40	APULN40	100 kHz – 40 GHz
APULNXX	Option LN	Enhanced close in phase noise & frequency stability
APULNXX	Option FS	Ultra-fast switching speed
APULNXX	Option MOD	Analog modulation
APULNXX	Option FILT	Enhanced harmonic rejection
APULNXX	Option VREF	Variable External Reference
APULN6/12	Option PE4-6/12	Electrical step attenuator (6 & 12 GHz version)
APULN20/26	Option PE4-20/26	Electrical step attenuator (20 & 26 GHz version)
APULN40	Option PE4-40	Electrical step attenuator (40 GHz version)
APULNXX	Option EB	External power bank
APULNXX	Option GPIB	GPIB interface
APULNXX	Option LH	Desktop housing with color touch display
APULNXX	Option 1URM	19" 1HU rack enclosure
APULNXX	Option REAR	Move output to the rear
APULNXX	Option FLASH	MicroSD card slot for removable microSD memory
APULNXX	Option WE	One year warranty extension
APULNXX	Option ReCal	Recalibration with test data

GENERAL CHARACTERISTICS

Remote programming interfaces

Ethernet 100BaseT LAN interface,

USB 2.0 host & device

GPIB (IEEE-488.2,1987) with listen and talk (optional)

Control language SCPI Version 1999.0

Power requirements 24V ± 3.0 VDC; 25 W maximum

Mains adapter supplied: 100-240 VAC in/ 24 V 4.0 A DC out

Environmental (Levels similar to MIL-PRF-28800F Class 3/4)

Environmental stress Samples of this product have been type tested to be robust against the environmental stresses of storage, transportation, and end-use; those stresses to temperature, humidity, shock, vibration, altitude, and power line conditions.

Operating temperature range 0 to 45 °C

Storage temperature range -40 to 70 °C

Operating and storage altitude up to 15,000 feet (4600 m)

CE notice

EMC complies and EMC regulations and directives for emission and immunity to interference (EN 61326-1 Industrial, EN/IEC 61326-2-1).

Safety complies with applicable Safety regulation in line with IEC/EN 61010-1

This product complies with directive 2011/65/EU

Weight 2.5 kg (6 lbs) net, ≤ 4 kg (8 lb.) shipping

Dimensions 106 mm H x 172 mm W x 290 mm L (incl. connectors) [4.21 in H x 6.77 in W x 11.42 in L]

Recommended calibration cycle 24 months

Document History

Version/Status	Date	Author	Notes
V123	2019-02-28	jk	New layout
V124	2019-03-21	jk	Min. Pulse width w. option FS
V125	2019-10-1	jk	Pulsed chirps w. option FS
V126	2019-10-21	jk	Max power settings revised
V130	2020-1-26	jk	Option FILT added

AnaPico Ltd. of Switzerland

Europastrasse 9
8152 Glattbrugg
Switzerland

Phone +41 44 515 55 01
Fax +41 44 440 00 50
Email sales@anapico.com

www.anapico.com
www.anapico.com/downloads/

NOTES