

# DEVICE SPECIFICATIONS

## NI PXIe-6738

### 32-Channel High-Density Analog Output

This document lists the specifications for the NI 6738 analog output device. The following specifications are typical at 25 °C unless otherwise noted.

## Analog Output

---

Number of channels .....	32 voltage outputs
Resolution .....	16 bits, 1 in 65,536
DNL .....	±1.0 LSB maximum
Unscaled data format <sup>1</sup> .....	Unsigned integer (0 to 65,535)
Monotonicity .....	16 bits
Accuracy .....	Refer to the <a href="#">AO Absolute Accuracy</a> table
Maximum update rate (using local FIFO <sup>2</sup> )	
1 channel .....	1 MS/s
8 channels (1 channel per bank) <sup>3</sup> .....	1 MS/s
32 channels <sup>3</sup> .....	350 kS/s
Timing accuracy .....	50 ppm of sample rate
Timing resolution .....	10 ns
Output range .....	±10 V
Output coupling .....	DC
Output impedance .....	0.2 Ω
Output current drive .....	±10 mA
Overdrive protection .....	±15 V
Overdrive current .....	15 mA

<sup>1</sup> Used for writing unscaled or raw data and covers the range from negative full scale (0) to positive full scale (65,535).

<sup>2</sup> These numbers apply to continuous waveform generation using onboard memory only, which allows for the highest update rate by doing a single transfer of data over the bus. The maximum update rate in FIFO mode does not change regardless of the number of devices in the system.

<sup>3</sup> All analog output channels are grouped into banks, as shown in the [Device Pinouts](#) section. Each bank consists of four AO channels using one DAC. Any channels being used within a single bank will update simultaneously.

Power-on state.....±200 mV

Power-on/off glitch ..... 2.5 V peak for 100 ms

FIFO buffer size.....65,535 samples shared among channels used

Data transfers .....DMA (scatter-gather), programmed I/O

AO waveform modes

- Nonperiodic waveform
- Periodic waveform regeneration mode from onboard FIFO
- Periodic waveform regeneration from host buffer including dynamic update

Settling time, full scale step..... 15  $\mu$ s to  $\pm$ 4 LSB

Slew rate ..... 3.0 V/ $\mu$ s

Noise ..... 1.0 mV<sub>rms</sub>, DC to 1 MHz

AO update glitch

- Magnitude ..... 3.0 mV
- Duration ..... 10  $\mu$ s
- Glitch energy..... 3 nVs

Channel crosstalk.....-65 dB with SHC68-68-A2 cable (generating a 10 V, 100 point sinusoidal at 100 kHz on the reference channel)

Output stability .....Any passive load



**Note** AO update glitch is the glitch energy that occurs on all channels on the same bank as the result of a channel update, regardless of value. For example, if you update the value of AO 0, all channels within that bank AO <0..3> will experience this glitch regardless of whether their output voltages change.

## Absolute Accuracy

Absolute accuracy at full-scale number is valid immediately following self calibration and assumes the device is operating within 10 °C of the last external calibration.

**Table 1.** AO Absolute Accuracy

Nominal Range Positive Full Scale	Nominal Range Negative Full Scale	Residual Gain Error (ppm of Reading)	Gain Tempco (ppm/°C)	Reference Tempco (ppm/°C)	Offset Tempco (ppm)	Residual Offset Error (ppm of Range)	INL Error (ppm of Range)	Absolute Accuracy at Full Scale ( $\mu$ V)
10	-10	109	12	1	4	95	64	2,940



**Note** Accuracies listed are valid for up to two years from the device external calibration.

## AO Absolute Accuracy Equation

$$\text{AbsoluteAccuracy} = \text{OutputValue} \cdot (\text{GainError}) + \text{Range} \cdot (\text{OffsetError})$$

$$\text{GainError} = \text{ResidualGainError} + \text{GainTempco} \cdot (\text{TempChangeFromLastInternalCal}) + \text{ReferenceTempco} \cdot (\text{TempChangeFromLastExternalCal})$$

$$\text{OffsetError} = \text{ResidualOffsetError} + \text{OffsetTempco} \cdot (\text{TempChangeFromLastInternalCal}) + \text{INL\_Error}$$

## Digital I/O/PFI

---

### Static Characteristics

Number of channels.....	10 total, 2 (P0.<0..1>), 8 (PFI <0..7>/P1.<0..7>)
Ground reference .....	D GND
Direction control.....	Each terminal individually programmable as input or output
Pull-down resistor.....	50 kΩ typical, 20 kΩ minimum
Input voltage protection <sup>1</sup> .....	±20 V on up to two pins

### Waveform Characteristics (Port 0 Only)

Terminals used.....	Port 0 (P0.<0..1>)
Port/sample size.....	Up to 2 bits
Waveform generation (DO) FIFO .....	2,047 samples
Waveform acquisition (DI) FIFO .....	255 samples
DI Sample Clock frequency .....	0 to 10 MHz, system and bus activity dependent
DO Sample Clock frequency	
Regenerate from FIFO.....	0 to 10 MHz
Streaming from memory.....	0 to 10 MHz, system and bus activity dependent
Data transfers.....	DMA (scatter-gather), programmed I/O
Digital line filter settings.....	160 ns, 10.24 μs, 5.12 ms, disable

---

<sup>1</sup> Stresses beyond those listed under *Input voltage protection* may cause permanent damage to the device.

# PFI/Port 1 Functionality

Functionality ..... Static digital input, static digital output, timing input, timing output

Timing output sources ..... Many AI, AO, counter, DI, DO timing signals

Debounce filter settings ..... 90 ns, 5.12  $\mu$ s, 2.56 ms, custom interval, disable; programmable high and low transitions; selectable per input

## Recommended Operating Conditions

Input high voltage ( $V_{IH}$ ) ..... 2.2 V minimum, 5.25 V maximum

Input low voltage ( $V_{IL}$ ) ..... 0 V minimum, 0.8 V maximum

Output high current ( $I_{OH}$ )

    P0.<0..1> ..... -24 mA maximum

    PFI <0..7>/P1<0..7> ..... -16 mA maximum

Output low current ( $I_{OL}$ )

    P0.<0..1> ..... 24 mA maximum


    PFI <0..7>/P1<0..7> ..... 16 mA maximum

## Electrical Characteristics


Level	Minimum	Maximum
Positive-going threshold ( $V_{T+}$ )	—	2.2 V
Negative-going threshold ( $V_{T-}$ )	0.8 V	—
Delta VT hysteresis ( $V_{T+} - V_{T-}$ )	0.2 V	—
$I_{IL}$ input low current ( $V_{in} = 0$ V)	—	-10 $\mu$ A
$I_{IH}$ input high current ( $V_{in} = 5$ V)	—	250 $\mu$ A

# Digital I/O Characteristics


**Figure 1.** P0.<0..1>:  $I_{OH}$  versus  $V_{OH}$

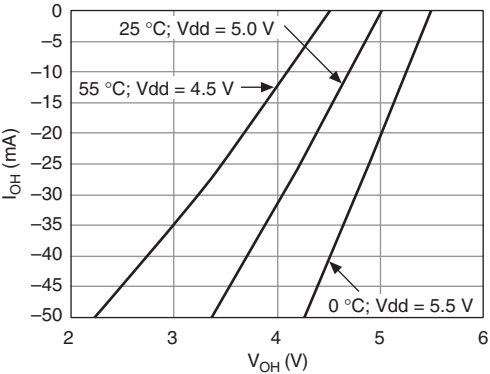


**Figure 2.** PFI <0..7>/P1:  $I_{OH}$  versus  $V_{OH}$

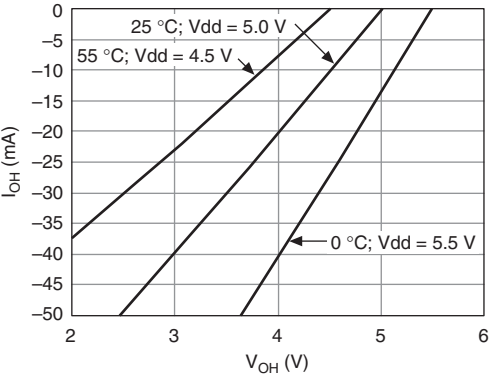

**Figure 3.** P0.<0..1>:  $I_{OL}$  versus  $V_{OL}$

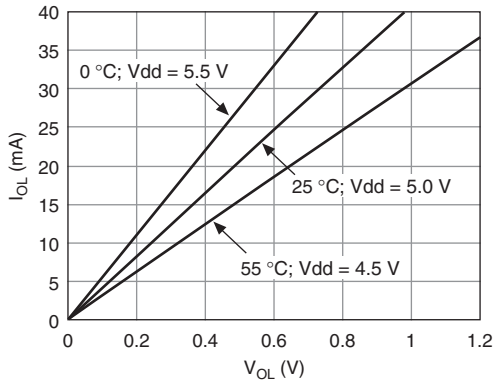

**Figure 4.** PFI <0..7>/P1:  $I_{OL}$  versus  $V_{OL}$

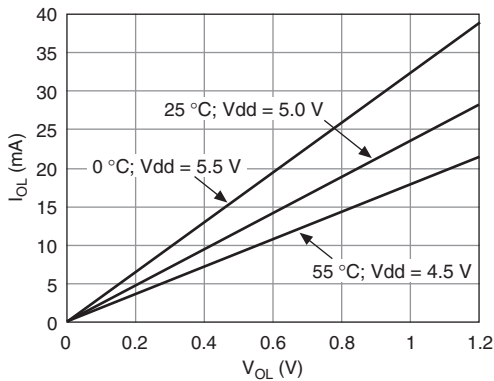

## Timing I/O

Number of counter/timers .....	4
Resolution .....	32 bits
Counter measurements .....	Edge counting, pulse, pulse width, semi-period, period, two-edge separation
Position measurements .....	X1, X2, X4 quadrature encoding with Channel Z reloading; two-pulse encoding
Output applications .....	Pulse, pulse train with dynamic updates, frequency division, equivalent time sampling
Internal base clocks .....	100 MHz, 20 MHz, 100 kHz
External base clock frequency .....	0 MHz to 25 MHz

Base clock accuracy.....	50 ppm
Inputs .....	Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down, Sample Clock
Routing options for inputs .....	Any PFI, PXIe_DSTAR<A,B>, PXI_TRIG, PXI_STAR, many internal signals
FIFO.....	127 samples per counter
Data transfers .....	Dedicated scatter-gather DMA controller for each counter/timer, programmed I/O

## Phase-Locked Loop (PLL)

---

Number of PLLs ..... 1

**Table 2.** Reference Clock Locking Frequencies

Reference Signal	Locking Input Frequency (MHz)
PXIe_DSTAR<A,B>	10, 20, 100
PXI_STAR	10, 20
PXIe_CLK100	100
PXI_TRIG <0..7>	10, 20
PFI <0..7>	10, 20

Output of PLL..... 100 MHz Timebase; other signals derived from  
100 MHz Timebase including 20 MHz and  
100 kHz Timebases

## External Digital Triggers

---

Source .....

Any PFI, PXIe\_DSTAR<A,B>, PXI\_TRIG,  
PXI\_STAR

Polarity..... Software-selectable for most signals

Analog output function..... Start Trigger, Pause Trigger, Sample Clock,  
Sample Clock Timebase

Counter/timer functions..... Gate, Source, HW\_Arm, Aux, A, B, Z,  
Up\_Down, Sample Clock

Digital waveform generation

(DO) function .....

Start Trigger, Pause Trigger, Sample Clock,  
Sample Clock Timebase

Digital waveform acquisition

(DI) function .....

Start Trigger, Reference Trigger, Pause Trigger,  
Sample Clock, Sample Clock Timebase

# Device-To-Device Trigger Bus

Input source.....	PXI_TRIG <0..7>, PXI_STAR, PXIe_DSTAR<A,B>
Output destination.....	PXI_TRIG <0..7>, PXIe_DSTARC
Output selections.....	10 MHz Clock; many internal signals
Debounce filter settings .....	90 ns, 5.12 $\mu$ s, 2.56 ms, custom interval, disable; programmable high and low transitions; selectable per input

## Bus Interface

---

Form factor .....	x1 PXI Express peripheral module, specification rev 1.0 compliant
Slot compatibility.....	x1 and x4 PXI Express or PXI Express hybrid slots
DMA channels .....	7 DMA, analog output, digital input, digital output, counter/timer 0, counter/timer 1, counter/timer 2, counter/timer 3

## Power Requirements

---



**Caution** The protection provided by the NI PXIe-6738 can be impaired if it is used in a manner not described in the user documentation.

+3.3 V .....	3.0 W
+12 V .....	14.0 W

## Current Limits

---



**Caution** Exceeding the current limits may cause unpredictable behavior by the device and/or chassis.

+5 V terminal (connector 0).....	1 A maximum <sup>1</sup>
P0/P1/PFI and +5 V terminals combined .....	1.4 A maximum

---

<sup>1</sup> Has a self-resetting fuse that opens when current exceeds this specification.



# Physical

---

Dimensions (not including connectors).....	16 cm × 10 cm (6.3 in. × 3.9 in.)
Weight.....	164 g (5.8 oz)
I/O connector .....	1 68-pin VHDCI

# Calibration

---

Recommended warm-up time.....	15 minutes
Calibration interval.....	2 years

# Maximum Working Voltage

---

Maximum working voltage refers to the signal voltage plus the common-mode voltage.

Channel-to-earth .....	±11 V, Measurement Category I
Channel-to-channel.....	±22 V, Measurement Category I



**Caution** Do not use this module for connection to signals or for measurements within Measurement Categories II, III, or IV.



**Note** Measurement Categories CAT I and CAT O (Other) are equivalent. The input circuits are not intended for direct connection to the MAINS building installations of Categories CAT II, CAT III, or CAT IV.

# Shock and Vibration

---

Operational shock.....	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Meets MIL-PRF-28800F Class 2 limits.)
------------------------	--

## Random vibration

Operating .....	5 to 500 Hz, 0.3 g <sub>rms</sub>
Nonoperating .....	5 to 500 Hz, 2.4 g <sub>rms</sub> (Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

# Environmental

---

The NI 6738 is intended for indoor use only.

Maximum altitude.....2,000 meters

Pollution Degree ..... 2



**Note** Clean the device with a soft, non-metallic brush. Make sure that the device is completely dry and free from contaminants before returning it to service.

## Operating Environment

Ambient temperature range ..... 0 to 55 °C  
(Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 low temperature limit and MIL-PRF-28800F Class 2 high temperature limit.)

Relative humidity range..... 10 to 90% RH, noncondensing  
(Tested in accordance with IEC 60068-2-56.)

## Storage Environment

Ambient temperature range .....-40 to 71 °C  
(Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 limits.)

Relative humidity range..... 5 to 95% RH, noncondensing  
(Tested in accordance with IEC 60068-2-56.)

## Safety

---

This product meets the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



**Note** For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

# Electromagnetic Compatibility

---

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use; for radio equipment; and for telecommunication terminal equipment:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



**Note** In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



**Note** For EMC declarations and certifications refer to the [Online Product Certification](#) section.

## CE Compliance

---

This product meets the essential requirements of applicable European Directives as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2011/65/EU; Restriction of Hazardous Substances (RoHS)

## Online Product Certification

---

To obtain product certifications and the Declaration of Conformity (DoC) for this product, visit [ni.com/certification](http://ni.com/certification), search by model number or product line, and click the appropriate link in the Certification column.

# Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at [ni.com/environment](http://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## Waste Electrical and Electronic Equipment (WEEE)



**EU Customers** At the end of the product life cycle, all products *must* be sent to a WEEE recycling center. For more information about WEEE recycling centers, National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste and Electronic Equipment, visit [ni.com/environment/weee](http://ni.com/environment/weee).

## 电子信息产品污染控制管理办法（中国 RoHS）



**中国客户** National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china).)

## Worldwide Support and Services

---

The National Instruments website is your complete resource for technical support. At [ni.com/support](http://ni.com/support) you have access to everything from troubleshooting and application development self-help resources to email and phone assistance from NI Application Engineers.

Visit [ni.com/services](http://ni.com/services) for NI Factory Installation Services, repairs, extended warranty, and other services.

Visit [ni.com/register](http://ni.com/register) to register your National Instruments product. Product registration facilitates technical support and ensures that you receive important information updates from NI.

A Declaration of Conformity (DoC) is our claim of compliance with the Council of the European Communities using the manufacturer's declaration of conformity. This system affords the user protection for electromagnetic compatibility (EMC) and product safety. You can obtain the DoC for your product by visiting [ni.com/certification](http://ni.com/certification). If your product supports calibration, you can obtain the calibration certificate for your product at [ni.com/calibration](http://ni.com/calibration).

National Instruments corporate headquarters is located at 11500 North Mopac Expressway, Austin, Texas, 78759-3504. National Instruments also has offices located around the world. For telephone support in the United States, create your service request at [ni.com/support](http://ni.com/support) or dial 1 866 ASK MYNI (275 6964). For telephone support outside the United States, visit the Worldwide Offices section of [ni.com/niglobal](http://ni.com/niglobal) to access the branch office websites, which provide up-to-date contact information, support phone numbers, email addresses, and current events.

# Device Pinouts

**Figure 5. NI PXIe-6738 Pinout**

CONNECTOR 0  
(AO 0–31)

AO Bank	AO GND 30/31	68	34	AO 31
	AO 30	67	33	AO GND 28/29
	AO 29	66	32	AO 28
AO Bank	AO GND 26/27	65	31	AO 27
	AO 26	64	30	AO GND 24/25
	AO 25	63	29	AO 24
AO Bank	AO GND 22/23	62	28	AO 23
	AO 22	61	27	AO GND 20/21
	AO 21	60	26	AO 20
AO Bank	AO GND 18/19	59	25	AO 19
	AO 18	58	24	AO GND 16/17
	AO 17	57	23	AO 16
AO Bank	AO GND <sup>1</sup>	56	22	AO 15
	AO GND 14/15	55	21	AO 14
	AO 13	54	20	AO GND 12/13
AO Bank	AO 12	53	19	AO GND <sup>1</sup>
	AO 11	52	18	AO GND 11
	AO 10	51	17	AO 9
AO Bank	AO GND 8/9/10	50	16	AO 8
	AO GND 6/7	49	15	AO 7
	AO 6	48	14	AO GND 4/5
AO Bank	AO 5	47	13	AO 4
	AO GND 2/3	46	12	AO 3
	AO 2	45	11	AO GND 0/1
AO Bank	AO 1	44	10	AO 0
	D GND <sup>1</sup>	43	9	PFI 7/P1.7
	D GND PFI 6/7	42	8	PFI 6/P1.6
	D GND PFI 4/5	41	7	PFI 5/P1.5
	PFI 4/P1.4	40	6	PFI 3/P1.3
	D GND PFI 2/3	39	5	PFI 2/P1.2
	PFI 1/P1.1	38	4	PFI 0/P1.0
	D GND PFI 0/1	37	3	P0.1
	D GND P0.0/0.1	36	2	P0.0
	D GND <sup>1</sup>	35	1	+5 V

<sup>1</sup> No connect when using the SHC68-68-A2 cable.

Refer to the *NI Trademarks and Logo Guidelines* at [ni.com/trademarks](http://ni.com/trademarks) for more information on National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patents Notice* at [ni.com/patents](http://ni.com/patents). You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at [ni.com/legal/export-compliance](http://ni.com/legal/export-compliance) for the National Instruments global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2015 National Instruments. All rights reserved.