



Data Sheet

RISH CON-CA/CV



Measure



Control



Record



Analyze

Application

The transducer **RISH CON - CA/CV** (Fig.1) converts a sinusoidal AC Current or AC Voltage into **load independent** DC Current or a **load independent** DC Voltage proportional to the measured value.

Salient Features

- Arithmetical mean value measurement Calibration to RMS with sine waveform (Average Value)
- Accuracy **class 0.2** as per International Standard **IEC/EN 60 688**.
- Wide range Auxiliary Power Supply
60-300 V AC/DC. or 20-40 VAC/20-60 VDC
- **Dual Isolated DC current or DC voltage outputs**
- Output Response Time < 250 ms
- Fast and easy installation on DIN RAIL or onto a wall or in panel using optional screw hole bracket
- Connection Terminal: Conventional Screw type
- Narrow housing, 22.5 mm / saves space and costs
- Connection Terminal: Conventional Screw type
- Narrow housing, 22.5 mm / saves space and costs

Product Features

Measuring Input

AC Current/ Voltage input signal , sine wave.

Analog Output (Dual)

Isolated analog output, which can be Voltage or Current.

Accuracy

Output signal accuracy **class 0.2** as per International Standard **IEC/EN 60 688**

LED Indication

LED indication for power ON

Output Response Time

< 250 ms.



Fig. 1. Transducer RISH CON - CA/ CV

Symbols and their meanings

X = Input AC Voltage / AC Current	H/L = Power supply.
Y = Output DC Voltage / DC Current	Y0 = Start value of output DC
Y2 = End value of output DC	UN = Nominal input voltage.
FN = Nominal Frequency	IN = Nominal input current.
RN = Rated value of output burden	

Mode of Operation

Input signal X is separated from the mains network by using a transformer. The signal is rectified and filtered in rectifier unit. The transformation properties of the measuring transducer are determined in the succeeding characteristics circuit. The isolated output amplifiers transforms the measuring signal into an impressed output signal Y. The circuit is supplied with Auxiliary supply H or L.

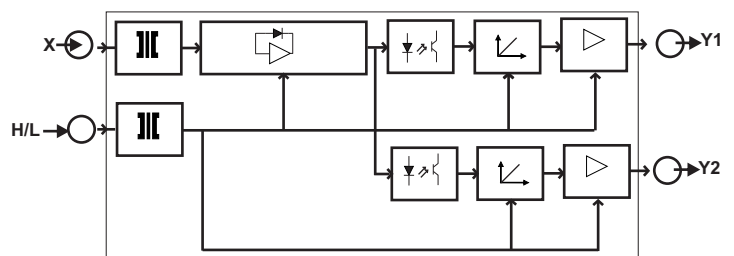


Fig. 2. Block Diagram.



Measure



Control



Record



Analyze

Technical Specifications

Measuring Input X

Voltage Transducer (RISH CON - CV)

Final value of Nominal input

Voltage U_N (X2) AC RMS

$63.5V \leq U_N \leq 500 V.$

Nominal Frequency F_N

50 or 60 Hz.

Nominal input Voltage burden

$< 0.6 VA$ at U_N .

Overload Capacity

$1.2 * U_N$ continuously,
 $2 * U_N$ for 1 second, repeated 10 times at 10 second intervals

Current Transducer (RISH CON - CA)

Final value of Nominal input

Current I_N (X2) AC RMS

1 A, 5 A.

Nominal Frequency F_N

50 or 60 Hz.

Nominal input Current burden

$< 0.2VA$ at I_N .

Overload Capacity

$1.2 * I_N$ continuously,
 $10 * I_N$ for 3 second, repeated 5 times at 5 minute intervals,
 $20 * I_N$ for 1 second, repeated 5 times at 5 minute intervals,
 $50 * I_N$ for 1 second.

Measuring Output Y(Dual)

Output type

Load independent DC Voltage/Current.

Load independent DC output (Y)

Calibration to RMS with sine waveform (Average Value)

0...10mA, 0...20mA, 2...10mA,

4...20mA, 0...5V, 0...10V.

Output burden with DC current output Signal

$0 \leq R \leq 15 V/Y2$

Output burden with DC voltage output Signal

$Y2/(2 mA) \leq R \leq \infty$

Current limit under overload $R=0$

$\leq 1.6*Y2$ with Current output.

$\leq 40 mA$ with Voltage output.

Voltage limit under $R=\infty$

$\leq 1.6*Y2$ with Voltage output.

$\leq 25 V$ with Current output.

Residual Ripple in Output signal

$\leq 1\%$ pk-pk.

Response Time

$< 250 ms.$

Auxiliary Supply H/L

Rated operating voltage(for high Aux. supply H)

60...300 V AC/DC

Rated operating range of frequency(for high Aux. supply H)

45...50...60...65 Hz

Power consumption(for high Aux. supply H)

$< 5 VA$

Rated operating voltage(for low Aux. supply L)

20...40 VAC/20...60 VDC

Rated operating range of frequency(for low Aux. supply L)

45...50...60...65 Hz

Power consumption(for low Aux. supply L)

$< 5 VA$



Measure



Control



Record



Analyze



Accuracy (Acc. to IEC/EN 60 688)

Accuracy class 0.2

Reference conditions for Accuracy

Ambient temperature	23°C +/- 1°C
Pre-conditioning	30 min acc. to IEC/EN 60 688
Input Variable	Rated Voltage Range / Rated Current Range.
Input waveform	Sinusoidal
Input signal frequency	50...60Hz
Auxiliary supply voltage	230 V AC/DC (for high Aux. supply H) 24 V AC/DC (for low Aux. supply L)
Auxiliary supply frequency	50Hz
Output Load	RN = 7.5 V / Y2 ± 1% With DC Current output signal. RN = Y2 / 1 mA ± 1% With DC Voltage output signal.
Miscellaneous	Acc. to IEC/EN 60 688
Additional Error Temperature influence	± 0.2% /10°C
Influence of Variations	As per IEC/EN 60 688 standard.

Output characteristics

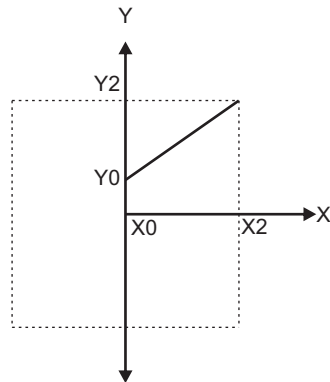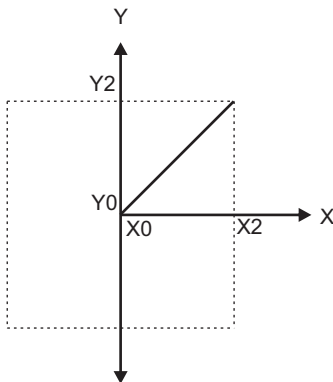

X0 = Start value of input

Y0 = Start value of output

X2 = End value of input=UN/IN

Y2 = End value of output

UN = Nominal input voltage

IN = Nominal input current



Measure



Control



Record



Analyze

Safety

Protection Class	II (Protection Isolated, EN 61 010)
Protection	IP 40, housing according to EN 60 529 IP 20 ,terminal according to EN 60 529
Pollution degree	2
Installation Category	III (At \leq 300V) II (At $>$ 300V)
Insulation Voltage	7770V DC, Input versus outer surface. 5230V DC, Input versus all other circuits. 5230V DC, Auxiliary supply versus input and output circuits. 690V DC, Output versus output versus each other versus outer surface.

Installation Data

Mechanical Housing	Lexan 940 (polycarbonate) Flammability Class V-0 acc. To UL 94, self extinguishing, non dripping, free of halogen.
Mounting position	Rail mounting / wall mounting.
Weight	Approx. 0.2Kg

Connection Terminal

Connection Element	Conventional Screw type terminal with indirect wire pressure
Permissible cross section of the connection lead	\leq 4.0 mm ² single wire or 2 x 2.5 mm ² fine wire

Environmental

Nominal range of use	0 °C... <u>23 °C</u> ... 45 °C (usage Group II)
Storage temperature	-40 °C to 70 °C
Relative humidity of annual mean	\leq 75%
Altitude	up to 2000 m

Ambient tests

IEC 60 068-2-6	Vibration
Acceleration	\pm 2 g
Frequency range	10....150...10Hz,
Rate of frequency sweep	1 octave/minute
Number of cycles	10, in each of the three axes
IEC 60 068-2-27	Shock
Acceleration	3 x 50g 3 shocks in each in 6 directions
IEC 61 000-4-2/-3/-4/-5/-6 EN 55 011	Electromagnetic compatibility.



Measure



Control



Record



Analyze

Ordering Information

Product Code	CM23-	X	XX	X	XX	XX	00000
Product Type	Rish CON CA	A					
	Rish CON CV	V					
Input Range	1A		62				
	5A		69				
	1.33A		65				
	0-63.5V		6D				
	0-100V		6J				
	0-110V		6K				
	0-120V		6L				
	0-150V		6W				
	0-220V		6Z				
	0-230V		7A				
	0-240V		7B				
	0-250V		7D				
	0-300V		7G				
	0-330V		7M				
	0-415V		7R				
	0-440V		7S				
	0-450V		7T				
	0-500V		7V				
	0-137.5V		66				
	0-132.5V		67				
	0-40V		6A				
Power Supply	60-300V AC / DC			G			
	20-40V AC/ 20-60V DC			F			
Output Range 1	0-10mA					30	
	0-5mA					31	
	0-20mA					32	
	2-10mA					54	
	4-20mA					55	
	0-5V					5F	
	0-10V					5H	
Output Range 2	0-10mA						30
	0-5mA						31
	0-20mA						32
	2-10mA						54
	4-20mA						55
	0-5V						5F
	0-10V						5H

Ordering Example

CM23-A69G555500000 - Rish CON CA, Input: 5A, Aux 60-300 VAC/DC, Output 1 : 4-20mA, Output 2 : 4-20mA



Measure



Control



Record



Analyze

Electrical Connections

Connection	Terminal details	
Measuring input	~	5 6
Auxilliary Power supply	~ , + ~ , -	7 8
Measuring output - 1	+ -	1 2
Measuring output - 2	+ -	3 4

LED Indication



ON LED	Aux.supply healthy condition	Red LED continuous ON
--------	------------------------------	-----------------------



Fig. 2.

Fig. 3. RISH CON - CV/CA Connection Diagram.

Dimensions

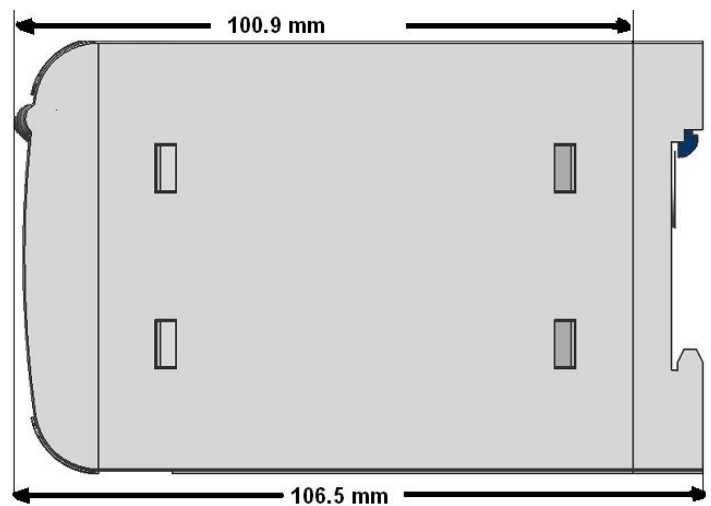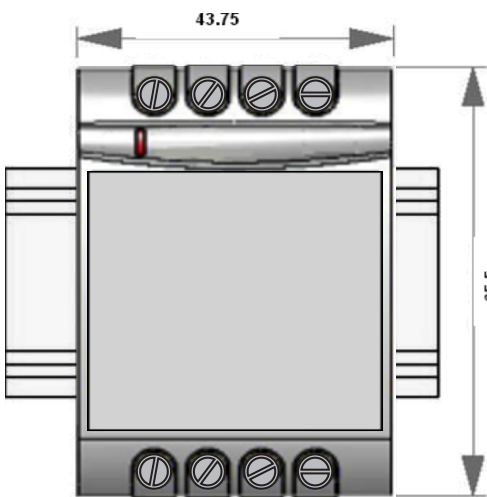

Note : All Dimensions are in mm.

Fig. 4. RISH CON - CV/CA Dimensions.



Measure



Control



Record



Analyze



RISHABH



Measure



Control



Record



Analyze

RISHABH INSTRUMENTS PVT. LTD.

Domestic (India): +91 253 2202028/99 | marketing@rishabh.co.in

International: +91 253 2202004/06/08/99 | global@rishabh.co.in

www.rishabh.co.in