

SPECIFICATIONS

PXIe-5160

PXIe, 500 MHz, 2.5 GS/s, 10-Bit PXI Express Oscilloscope

Contents

Definitions.....	2
Conditions.....	2
Vertical.....	3
Analog Input.....	3
Impedance and Coupling.....	3
Voltage Levels.....	4
Accuracy.....	5
Bandwidth and Transient Response.....	5
Spectral Characteristics.....	9
Horizontal.....	12
Sample Clock.....	12
Phase-Locked Loop (PLL) Reference Clock.....	12
External Sample Clock (CLK IN, Front Panel Connector).....	13
External Reference Clock In (CLK IN, Front Panel Connector).....	13
Reference Clock Out (CLK OUT, Front Panel Connector).....	13
Trigger.....	14
Analog Trigger (Edge Trigger Type).....	14
External Trigger (TRIG, Front Panel Connector).....	15
Digital Trigger (Digital Trigger Type).....	15
Programmable Function Interface (PFI 0 and PFI 1, Front Panel Connectors).....	15
CableSense.....	16
Waveform Specifications.....	17
Memory Sanitization.....	17
Calibration.....	17
External Calibration.....	17
Self-Calibration.....	17
Calibration Specifications.....	17
Software.....	18
Driver Software.....	18
Application Software.....	18
Interactive Soft Front Panel and Configuration.....	18
TClk Specifications.....	18
Power Requirements.....	19
Physical Characteristics.....	19

Environmental Characteristics.....	20
Product Certifications and Declarations.....	20

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty. *Warranted* specifications account for measurement uncertainties, temperature drift, and aging. *Warranted* specifications are ensured by design, or verified during production and calibration.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the performance met by a majority of models.
- *Nominal* specifications describe an attribute that is based on design, conformance testing, or supplemental testing.
- *Measured (meas)* specifications describe the measured performance of a representative model.

Specifications are *Typical* unless otherwise noted.

Conditions

Specifications are valid under the following conditions unless otherwise noted.

- All vertical ranges
- All bandwidths and bandwidth limit filters
- Sample rate set to 1.25 GS/s or 2.5 GS/s
- Onboard Sample clock locked to onboard Reference clock

Warranted specifications are valid under the following conditions unless otherwise noted.

- Ambient temperature ranges of 0 °C to 45 °C
- The PXIe-5160 is warmed up for 15 minutes at ambient temperature
- Self-calibration is completed after warm-up period
- Calibration cycle is maintained
- The PXI Express chassis fan speed is set to HIGH, the foam fan filters are removed if present, and the empty slots contain PXI chassis slot blockers and filler panels. For more information about cooling, refer to the Maintain Forced-Air Cooling Note to Users document available at ni.com/manuals.
- NI-SCOPE 4.1 or later instrument driver is used
- External calibration is performed at 23 °C ± 3 °C

Typical specifications are valid under the following conditions unless otherwise noted:

- Ambient temperature ranges of 0 °C to 45 °C

Vertical

Analog Input

Number of channels

PXIe-5160 (2 CH)

Two (simultaneously sampled)

PXIe-5160 (4 CH)

Four (simultaneously sampled)

Input type

Referenced single-ended

Connectors

BNC

Impedance and Coupling



Note Impedance and coupling are software-selectable on a per-channel basis.

Table 1. Input Impedance

Impedance Setting	Typical	Warranted
50 Ω	50 $\Omega \pm 1.50\%$	50 $\Omega \pm 1.75\%$
1 M Ω	1 M $\Omega \pm 0.75\%$	1 M $\Omega \pm 0.90\%$

Input capacitance¹

15 pF \pm 0.8 pF, nominal

15 pF \pm 2.5 pF, warranted

Input coupling

AC, DC

Table 2. Voltage Standing Wave Ratio (VSWR), Nominal²

Frequency	VSWR
DC $\leq f \leq$ 500 MHz	1.1:1

¹ 1 M Ω input only.

² 50 Ω input only.

Voltage Levels

Table 3. 50 Ω Full-Scale (FS) Input Range and Vertical Offset Range

Input Range (V_{pk-pk})	Vertical Offset Range (V)
0.05 V	±0.5
0.1 V	±0.5
0.2 V	±0.5
0.5 V	±0.5
1 V	±0.5
2 V	±1.5
5 V	0

Table 4. 1 MΩ FS Input Range and Vertical Offset Range

Input Range (V_{pk-pk})	Vertical Offset Range (V)
0.05 V	±0.5
0.1 V	±0.5
0.2 V	±0.5
0.5 V	±0.5
1 V	±0.5
2 V	±5
5 V	±5
10 V	±5
20 V	±30
50 V	±15

Maximum input overload³

50 Ω	Peaks ≤5 V, nominal
1 MΩ	Peaks ≤42 V, nominal

³ Signals exceeding the maximum input overload may cause damage to the device.

Accuracy

Resolution	10 bits
DC accuracy ⁴	$\pm[(2\% \times \text{Reading} - \text{Vertical Offset}) + (1.4\% \times \text{Vertical Offset}) + (0.6\% \text{ of } FS) + 600 \mu\text{V}]$
DC drift ⁵	$\pm[(0.1\% \times \text{Reading} - \text{Vertical Offset}) + (0.025\% \times \text{Vertical Offset}) + (0.03\% \text{ of } FS)]$ per °C, nominal
AC amplitude accuracy ⁴	± 0.5 dB at 50 kHz
AC amplitude drift ⁵	± 0.01 dB per °C at 50 kHz, nominal

Table 5. Crosstalk (CH to/from CH), Nominal⁶

Input Impedance	Input Frequency	Crosstalk
50 Ω	DC $\leq f \leq$ 100 MHz	-60 dB
	100 MHz $< f \leq$ 500 MHz	-45 dB
1 MΩ ⁷	DC $\leq f \leq$ 100 MHz	-55 dB
	100 MHz $< f \leq$ 200 MHz	-45 dB

Bandwidth and Transient Response

50 Ω bandwidth (-3 dB) ⁸	500 MHz, typical 475 MHz, warranted
-------------------------------------	--

⁴ Within ± 3 °C of self-calibration temperature. This specification is *typical* for peak-to-peak input ranges of 0.05 V to 0.1 V and *warranted* for all other input ranges.

⁵ Used to calculate errors when onboard temperature changes more than ± 3 °C from the self-calibration temperature.

⁶ Measured on one channel with test signal applied to another channel, with same range setting on both channels.

⁷ Only valid on peak-to-peak input ranges of 0.05 V to 10 V.

⁸ Normalized to 50 kHz.

⁹ For ambient temperature ranges of 0 °C to 30 °C.

Figure 1. PXIe-5160 Step Response, 50 Ω , 1 V_{pk-pk} Input Range, -0.25 V Programmable Offset, 500 ps Rising Edge, Measured


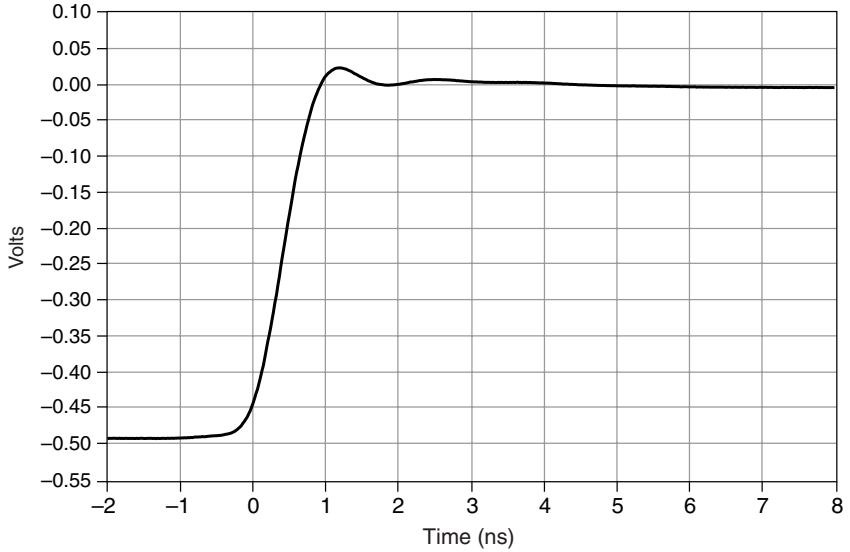


Figure 2. PXIe-5160 Step Response, 1 M Ω , 1 V_{pk-pk} Input Range, -0.25 V Programmable Offset, 500 ps Rising Edge, Measured¹⁷

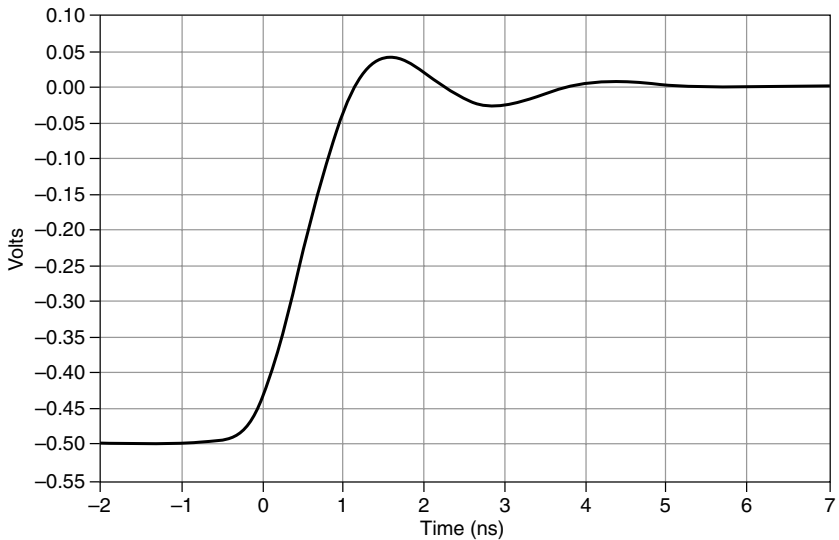

¹⁷ Verified using a 50 Ω source and 50 Ω feed-through terminator.

Figure 3. PXIe-5160 50 Ω Frequency Response, 1 V_{pk-pk}, 2.5 GS/s, Measured



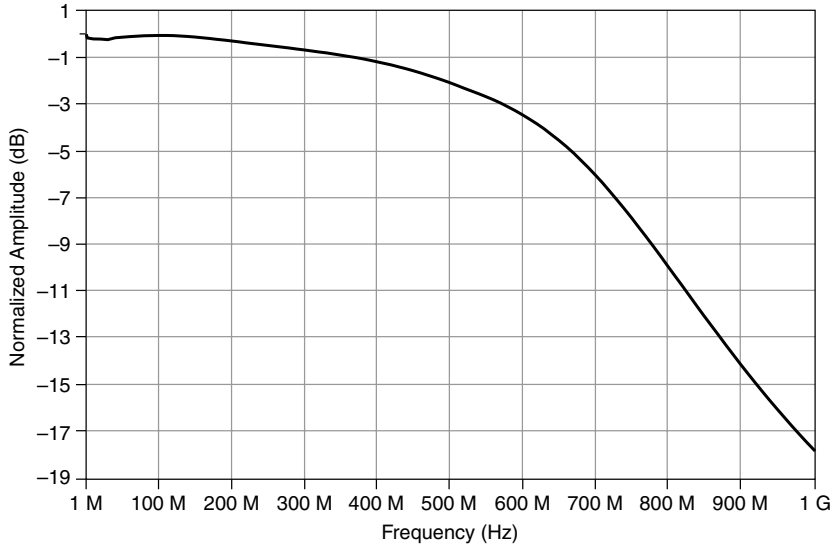


Figure 4. PXIe-5160 1 M Ω Frequency Response, 1 V_{pk-pk}, Measured¹⁸

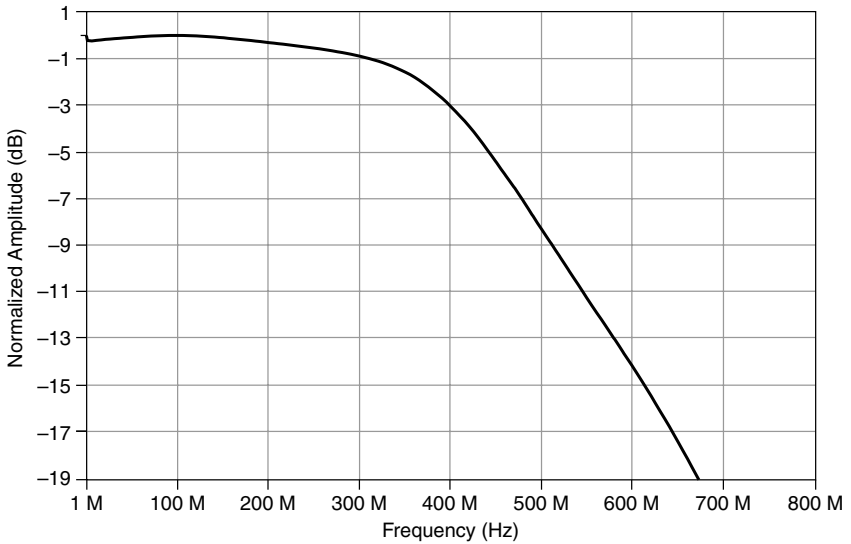

¹⁸ Verified using a 50 Ω source and 50 Ω feed-through terminator.

Figure 5. PXIe-5160 Bandwidth-Limiting Filters Frequency Response, 1 V_{pk-pk}, Measured

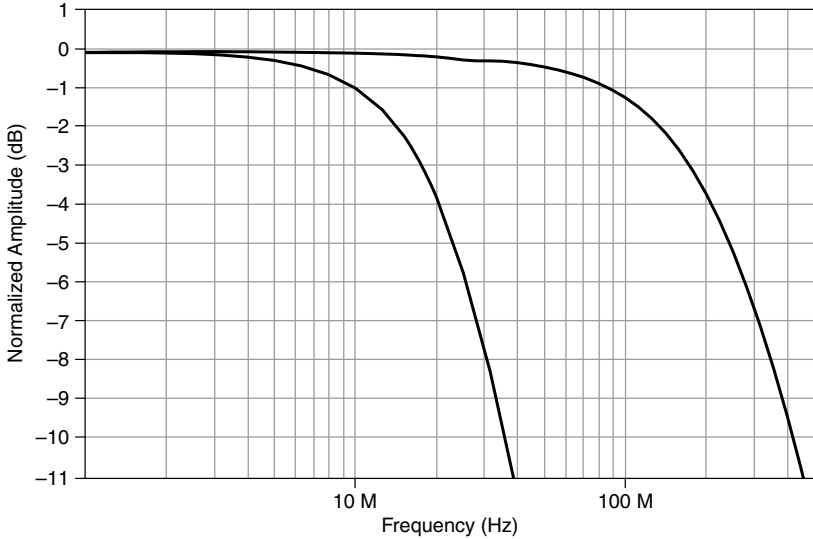

Spectral Characteristics

50 Ω Spectral Characteristics

Table 7. Spurious-Free Dynamic Range (SFDR), Nominal¹⁹


Input Frequency	SFDR
<10 MHz	56 dBc
≥10 MHz to ≤100 MHz	54 dBc

Table 8. Effective Number of Bits (ENOB), Nominal¹⁹

Input Frequency	Input Range (V _{pk-pk})	ENOB
<100 MHz	0.05 V	7.1
	0.1 V	7.4
	0.2 V to 5 V	7.6

¹⁹ -1 dBFS input signal corrected to FS. Includes the second through the fifth harmonics. 7.2 kHz resolution bandwidth.

Figure 6. PXIe-5160 Single Tone Spectrum, 2.98 dBm Input Signal at Connector, 50 Ω , 1 V_{pk-pk}, 2.5 GS/s, 101 MHz Input Tone, Full Bandwidth, Measured

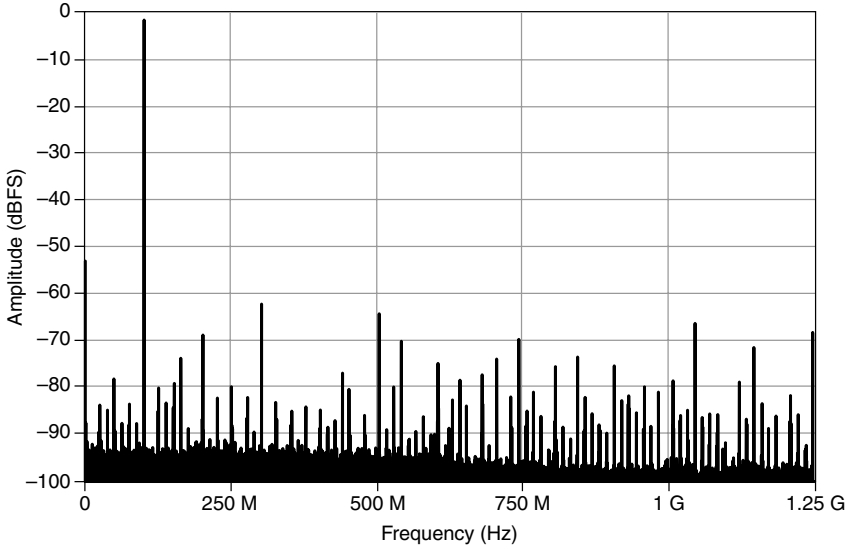

1 M Ω Spectral Characteristics²⁰

Table 9. SFDR, Nominal²¹

Input Frequency	Input Range (V _{pk-pk})	SFDR
<10 MHz	0.05 V to 10 V	53 dBc
	20 V	50 dBc
≥10 MHz to ≤100 MHz	0.05 V to 0.5 V	53 dBc
	1 V to 5 V	48 dBc

²⁰ Verified using a 50 Ω source and 50 Ω feed-through terminator.

²¹ -1 dBFS input signal corrected to FS. Includes the second through the fifth harmonics. 7.2 kHz resolution bandwidth.

Table 10. ENOB, Nominal²¹

Input Frequency	Input Range (V _{pk-pk})	ENOB
<10 MHz	0.05 V	6.8
	0.1 V	7.4
	0.2 V to 20 V	7.6
≤100 MHz	0.05 V	6.8
	0.1 V to 0.5 V	7.4
	1 V to 5 V	7.1

Noise

Table 11. RMS Noise²²

Input Impedance	Input Range (V _{pk-pk})	Typical	Warranted
50 Ω	0.05 V	0.26% of FS	0.3% of FS
	0.1 V	0.16% of FS	0.19% of FS
	0.2 V to 5 V	0.14% of FS	0.17% of FS
1 MΩ	0.05 V	0.26% of FS	0.3% of FS
	0.1 V	0.16% of FS	0.19% of FS
	0.2 V to 50 V	0.14% of FS	0.17% of FS

Skew

Channel-to-channel skew

50 Ω to 50 Ω	<25 ps, nominal
1 MΩ to 1 MΩ	<125 ps, nominal
50 Ω to 1 MΩ	<800 ps, nominal

²² Verified using a 50 Ω terminator connected to input.

Horizontal

Sample Clock

Sources

Internal	Onboard clock (internal VCO)
External	Front panel SMB connector

Onboard Clock

Real-time sample rate range²³

One channel enabled	76.299 kS/s to 2.5 GS/s
Two channels enabled ²⁴	76.299 kS/s to 2.5 GS/s
Four channels enabled	76.299 kS/s to 1.25 GS/s

Random interleaved sampling (RIS) range ²⁵	Up to 50 GS/s
---	---------------

Sample clock jitter ²⁶	250 fs RMS (12 kHz to 10 MHz), nominal
-----------------------------------	--

Timebase frequency	2.5 GHz
--------------------	---------

Timebase accuracy ²⁷	±10 ppm, typical ±25 ppm, warranted
---------------------------------	--

Phase-Locked Loop (PLL) Reference Clock

Sources

Internal	Onboard 10 MHz reference
External	External 10 MHz (front panel CLK IN connector) or PXI_CLK10 (backplane connector)

Duty cycle tolerance	45% to 55%
----------------------	------------

²³ Divide by n decimation from 1.25 GS/s used for all rates less than 1.25 GS/s. For more information about the Sample Clock and decimation, refer to the *NI High-Speed Digitizers Help*.

²⁴ For the PXIe-5160 (4 CH), supported on channels 0 and 2. For the PXIe-5160 (2 CH), supported on channels 0 and 1.

²⁵ With one channel enabled, stepped in multiples of 2.5 GS/s. With two channels enabled, stepped in multiples of 2.5 GS/s. With four channels enabled, stepped in multiples of 1.25 GS/s.

²⁶ Includes the effects of the converter aperture uncertainty and the clock circuitry jitter. Excludes trigger jitter.

²⁷ When phase-locked to an external Reference Clock, the timebase accuracy is equal to the external Reference Clock accuracy. For example, when locked to the System Reference Clock of a PXI Express chassis, the module inherits the accuracy of the chassis System Reference Clock.

External Sample Clock (CLK IN, Front Panel Connector)

Input voltage range, when configured as a Sample Clock	-10 dBm through 16 dBm
Maximum input overload, when configured as a Sample Clock	18 dBm
Impedance	50 Ω
Coupling	AC
Frequency range	1.25 GHz to 2.5 GHz ²⁸

External Reference Clock In (CLK IN, Front Panel Connector)

Input voltage range, when configured as a Reference Clock	200 mV _{pk-pk} to 4 V _{pk-pk}
Maximum input overload, when configured as a Reference Clock	5 V _{pk-pk} with Peaks \leq 10 V
Impedance	50 Ω
Coupling	AC
Frequency range ²⁹	10 MHz

Reference Clock Out (CLK OUT, Front Panel Connector)

Output impedance	50 Ω
Logic type	3.3 V CMOS
Maximum current drive	\pm 10 mA

²⁸ To achieve the same real-time sample rate ranges as the onboard clock, a 2.5 GHz frequency is required.

²⁹ The PLL Reference Clock frequency must be accurate to \pm 25 ppm.

Trigger

Supported trigger	Reference (Stop) Trigger
Trigger types	Edge Digital Immediate Hysteresis Software
Trigger sources	
PXIe-5160 (2 CH)	CH 0, CH 1, TRIG, PFI 0, PFI 1, PXI_TRIG <0..6>, and Software
PXIe-5160 (4 CH)	CH 0, CH 1, CH 2, CH 3, PFI 0, PFI 1, PXI_TRIG <0..6>, and Software
Time-to-digital conversion circuit time resolution	4 ps
Dead time	710 ns, nominal
Holdoff	6.4 ns to 27.4 s
Trigger delay	From 0 to 73,786,976 seconds (28 months), nominal

Analog Trigger (Edge Trigger Type)

Sources	
PXIe-5160 (2 CH)	CH 0, CH 1, or TRIG ³⁰
PXIe-5160 (4 CH)	CH 0, CH 1, CH 2, or CH 3
Trigger filters	
Low-frequency reject	150 kHz, nominal
High-frequency reject	150 kHz, nominal
Trigger sensitivity	3% of FS at ≤10 MHz, nominal
Trigger accuracy ³¹	6% of FS at ≤10 MHz, nominal
Trigger jitter	4.7 ps

³⁰ For specifications on the TRIG input, refer to the *External Trigger (TRIG, Front Panel Connector)* section.

³¹ When the impedance settings of the triggering input and the analog input channel are the same. Delay will increase if the impedance of the triggering input does not match the impedance of the analog input channel.

External Trigger (TRIG, Front Panel Connector)



Note TRIG is valid only for the PXIe-5160 (2 CH) device.

Connector	BNC
Impedance	50 Ω or 1 M Ω
Coupling	AC or DC
Input voltage range	
50 Ω	± 2.5 V
1 M Ω	± 5 V
Maximum input overload	
50 Ω	Peaks ≤ 5 V, nominal
1 M Ω	Peaks ≤ 42 V, nominal
Trigger sensitivity	3% of FS at ≤ 10 MHz, nominal
Trigger accuracy ³²	6% of FS at ≤ 10 MHz, nominal
Trigger jitter	4.7 ps

Digital Trigger (Digital Trigger Type)

Sources³³

Front panel SMB connector	PFI <0..1>
Backplane connector	PXI_TRIG <0..6>

Programmable Function Interface (PFI 0 and PFI 1, Front Panel Connectors)

Connector	SMB jack
Direction	Bidirectional

³² When the impedance settings of the triggering input and the analog input channel are the same. Delay will increase if the impedance of the triggering input does not match the impedance of the analog input channel.

³³ Subsample trigger accuracy not supported on PFI 1 or PXI_TRIG<0..6>.

As an Input (Trigger)

Destinations	Start Trigger (Acquisition Arm) Reference (Stop) Trigger Advance Trigger
Input impedance	10 k Ω
V _{IH}	2.0 V
V _{IL}	0.8 V
Maximum input overload	-0.5 V to 5.5 V
Maximum frequency	25 MHz

As an Output (Event)

Sources	Ready for Start Start Trigger (Acquisition Arm) Ready for Reference Arm Reference Trigger Reference (Stop) Trigger End of Record Ready for Advance Advance Trigger Done (End of Acquisition) Probe Compensation ³⁴
Output impedance	50 Ω , nominal
Logic type	3.3 V CMOS
Maximum current drive	± 10 mA
Maximum frequency	25 MHz

CableSense

CableSense pulse voltage ³⁵	0.5 V, nominal
CableSense pulse rise time ³⁶	950 ps, nominal

Driver support for CableSense on the PXIe-5160 was first available in NI-SCOPE 18.7.

Related Information

For more information about CableSense technology, refer to ni.com/cablesense.

³⁴ 1 kHz, 50% duty cycle square wave, PFI 1 only.

³⁵ When measured with a high-impedance device.

³⁶ When sourcing into a 50 Ω cable or load.

Waveform Specifications

Onboard memory sizes ³⁷	64 MB or 2 GB
Minimum record length	1 sample
Number of pretrigger samples ³⁸	Zero up to full record length
Number of posttrigger samples ³⁸	Zero up to full record length
Maximum number of records in onboard memory ³⁹	
64 MB	65,536
2 GB	100,000
Allocated onboard memory per record	$[(Record\ length + 448\ samples) \times 2\ bytes/sample]$, rounded up to an integer multiple of 128 bytes (minimum 512 bytes)

Memory Sanitization

For information about memory sanitization, refer to the letter of volatility for your device, which is available at ni.com/manuals.

Calibration

External Calibration

External calibration calibrates the onboard references used in self-calibration and the external trigger levels. All calibration constants are stored in nonvolatile memory.

Self-Calibration

Self-calibration is done on software command. The calibration corrects for gain, offset, triggering, and timing errors for all input ranges.

Calibration Specifications

Interval for external calibration	2 years
Warm-up time	15 minutes

³⁷ Onboard memory is shared among all enabled channels.

³⁸ Single-record and multirecord acquisitions.

³⁹ You can exceed these numbers if you fetch records while acquiring data. For more information, refer to the *NI High-Speed Digitizers Help*.

Software

Driver Software

Driver support for this device was first available in NI-SCOPE 4.1.

NI-SCOPE is an IVI-compliant driver that allows you to configure, control, and calibrate the PXIe-5160. NI-SCOPE provides application programming interfaces for many development environments.

Application Software

NI-SCOPE provides programming interfaces, documentation, and examples for the following application development environments:

- LabVIEW
- LabWindows™/CVI™
- Measurement Studio
- Microsoft Visual C/C++
- .NET (C# and VB.NET)

Interactive Soft Front Panel and Configuration

When you install NI-SCOPE on a 64-bit system, you can monitor, control, and record measurements from the PXIe-5160 using InstrumentStudio.

InstrumentStudio is a software-based front panel application that allows you to perform interactive measurements on several different device types in a single program.



Note InstrumentStudio is supported only on 64-bit systems. If you are using a 32-bit system, use the NI-SCOPE-specific soft front panel instead of InstrumentStudio.

Interactive control of the PXIe-5160 was first available via InstrumentStudio in NI-SCOPE 18.1 and via the NI-SCOPE SFP in NI-SCOPE 4.1. InstrumentStudio and the NI-SCOPE SFP are included on the NI-SCOPE media.

NI Measurement & Automation Explorer (MAX) also provides interactive configuration and test tools for the PXIe-5160. MAX is included on the driver media.

TClk Specifications

You can use the NI TClk synchronization method and the NI-TClk driver to align the Sample clocks on any number of supported devices, in one or more chassis. For more information about TClk synchronization, refer to the *NI-TClk Synchronization Help*, which is located within the *NI High-Speed Digitizers Help*. For other configurations, including multichassis systems, contact NI Technical Support at ni.com/support.

Intermodule SMC Synchronization Using NI-TCIk for Identical Modules

Specifications are valid under the following conditions:

- All modules are installed in one PXI Express chassis.
- The NI-TCIk driver is used to align the Sample clocks of each module.
- All parameters are set to identical values for each SMC-based module.
- Modules are synchronized without using an external Sample clock.
- Self-calibration is completed.



Note Although you can use NI-TCIk to synchronize non-identical SMC-based modules, these specifications apply only to synchronizing identical modules.

Skew ⁴⁰	100 ps, nominal
Skew after manual adjustment	≤5 ps, nominal
Sample clock delay/adjustment resolution	20 fs

Related Information

[NI-TCIk Overview](#)

For more information on manual adjustment, refer to [NI-TCIk Manual Calibration on NI-SCOPE Devices](#).

Power Requirements

+3.3 VDC	2.2 A, nominal
+12 VDC	2.3 A, nominal
Total power	34.8 W, nominal

Physical Characteristics

Dimensions	3U, 1 slot, PXI Express gen 1 x4 Module 21.4 cm × 2.0 cm × 13.1 cm (8.4 in. × 0.8 in. × 5.1 in.)
Weight	430 g (15 oz.)

⁴⁰ Caused by clock and analog path delay differences. No manual adjustment performed. Tested with a NI PXIe-1082 chassis with a maximum slot-to-slot skew of 100 ps.

Environmental Characteristics

Temperature and Humidity

Temperature

Operating	0 °C to 45 °C
-----------	---------------

Storage	-40 °C to 71 °C
---------	-----------------

Humidity

Operating	10% to 90%, noncondensing
-----------	---------------------------

Storage	5% to 95%, noncondensing
---------	--------------------------

Pollution Degree

2

Maximum altitude

2,000 m (800 mbar) (at 25 °C ambient temperature)

Shock and Vibration

Random vibration

Operating	5 Hz to 500 Hz, 0.3 g RMS
-----------	---------------------------

Non-operating	5 Hz to 500 Hz, 2.4 g RMS
---------------	---------------------------

Operating shock

30 g, half-sine, 11 ms pulse

Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help>Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.